


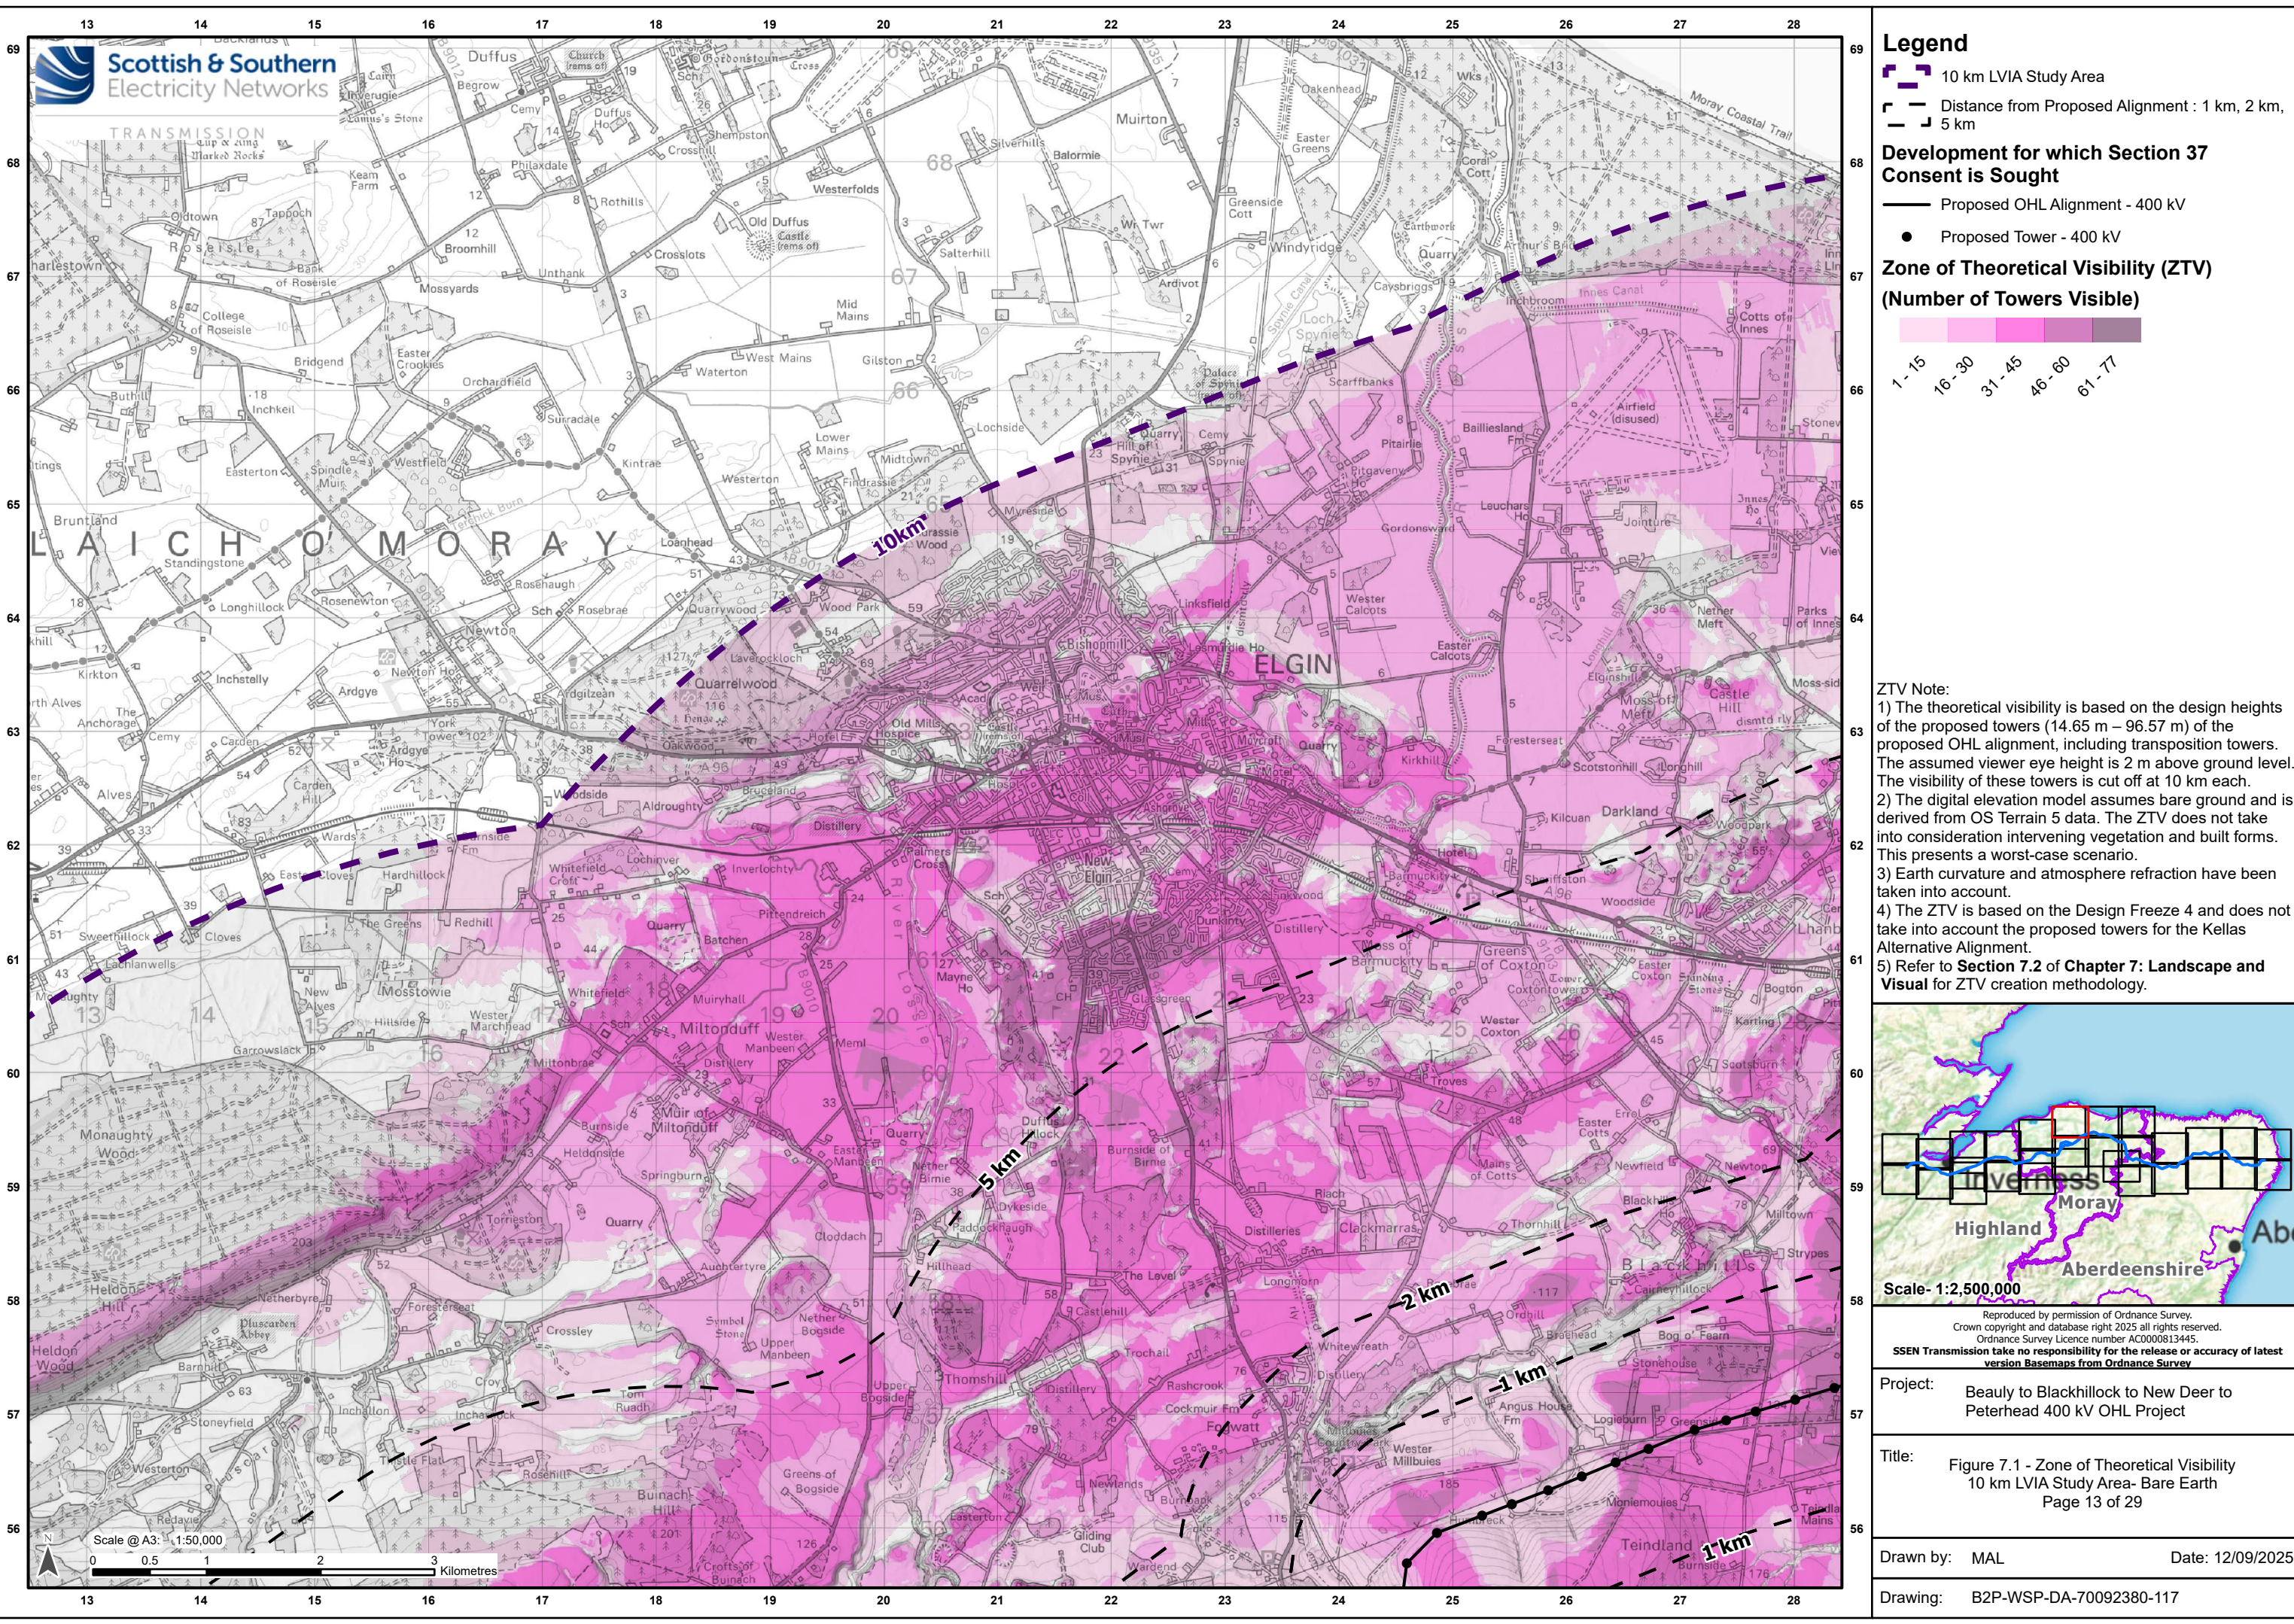


**Legend**

- 10 km LVIA Study Area
- Distance from Proposed Alignment : 1 km, 2 km, 5 km
- Proposed OHL Alignment - 400 kV
- Proposed Tower - 400 kV
- Zone of Theoretical Visibility (ZTV)**  
**(Number of Towers Visible)**
- 1 - 15
- 16 - 30
- 31 - 45
- 46 - 60
- 61 - 71

**ZTV Note:**

- 1) The theoretical visibility is based on the design heights of the proposed towers (14.65 m – 96.57 m) of the proposed OHL alignment, including transposition towers. The assumed viewer eye height is 2 m above ground level. The visibility of these towers is cut off at 10 km each.
- 2) The digital elevation model assumes bare ground and is derived from OS Terrain 5 data. The ZTV does not take into consideration intervening vegetation and built forms. This presents a worst-case scenario.
- 3) Earth curvature and atmosphere refraction have been taken into account.
- 4) The ZTV is based on the Design Freeze 4 and does not take into account the proposed towers for the Kellas Alternative Alignment.
- 5) Refer to **Section 7.2 of Chapter 7: Landscape and Visual** for ZTV creation methodology.

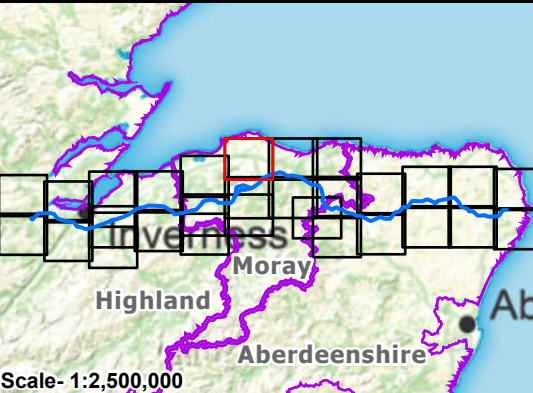

Reproduced by permission of Ordnance Survey.  
Crown copyright and database right 2025 all rights reserved.  
Ordnance Survey Licence number AC0000813445.  
**SSEN Transmission take no responsibility for the release or accuracy of latest version Basemaps from Ordnance Survey**

**Project:** Beaulieu to Blackhillock to New Deer to Peterhead 400 kV OHL Project

**Title:** Figure 7.1 - Zone of Theoretical Visibility  
10 km LVIA Study Area- Bare Earth  
Page 13 of 29

**Drawn by:** MAL **Date:** 12/09/2025

**Drawing:** B2P-WSP-DA-70092380-117

5-km

2-km

1-km

1-km

2-km

5-km

10-km

## Legend

10 km LVIA Study Area

Distance from Proposed Alignment : 1 km, 2 km, 5 km

## Development for which Section 37 Consent is Sought

Proposed OHL Alignment - 400 kV

Proposed Tower - 400 kV


## Zone of Theoretical Visibility (ZTV)

(Number of Towers Visible)



### ZTV Note:

- 1) The theoretical visibility is based on the design heights of the proposed towers (14.65 m – 96.57 m) of the proposed OHL alignment, including transposition towers. The assumed viewer eye height is 2 m above ground level. The visibility of these towers is cut off at 10 km each.
- 2) The digital elevation model assumes bare ground and is derived from OS Terrain 5 data. The ZTV does not take into consideration intervening vegetation and built forms. This presents a worst-case scenario.
- 3) Earth curvature and atmosphere refraction have been taken into account.
- 4) The ZTV is based on the Design Freeze 4 and does not take into account the proposed towers for the Kellas Alternative Alignment.
- 5) Refer to **Section 7.2 of Chapter 7: Landscape and Visual** for ZTV creation methodology.

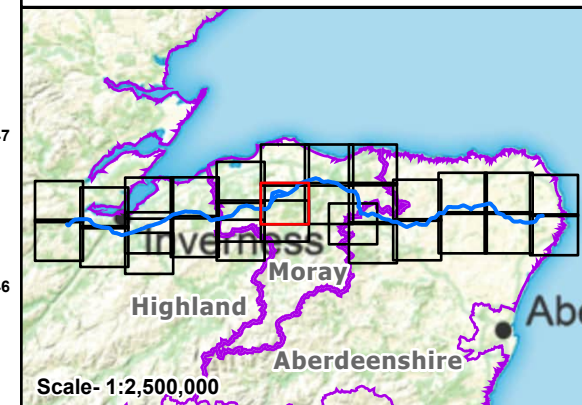

Scale- 1:2,500,000

Reproduced by permission of Ordnance Survey.  
Crown copyright and database right 2025 all rights reserved.  
Ordnance Survey Licence number AC0000813445.  
**SSEN Transmission take no responsibility for the release or accuracy of latest version Basemaps from Ordnance Survey**

Project: Beauly to Blackhillock to New Deer to Peterhead 400 kV OHL Project

Title: Figure 7.1 - Zone of Theoretical Visibility  
10 km LVIA Study Area- Bare Earth  
Page 14 of 29


Drawn by: MAL

Date: 12/09/2025

Drawing: B2P-WSP-DA-70092380-117

Scale @ A3: 1:50,000

0 0.5 1 2 3 Kilometres

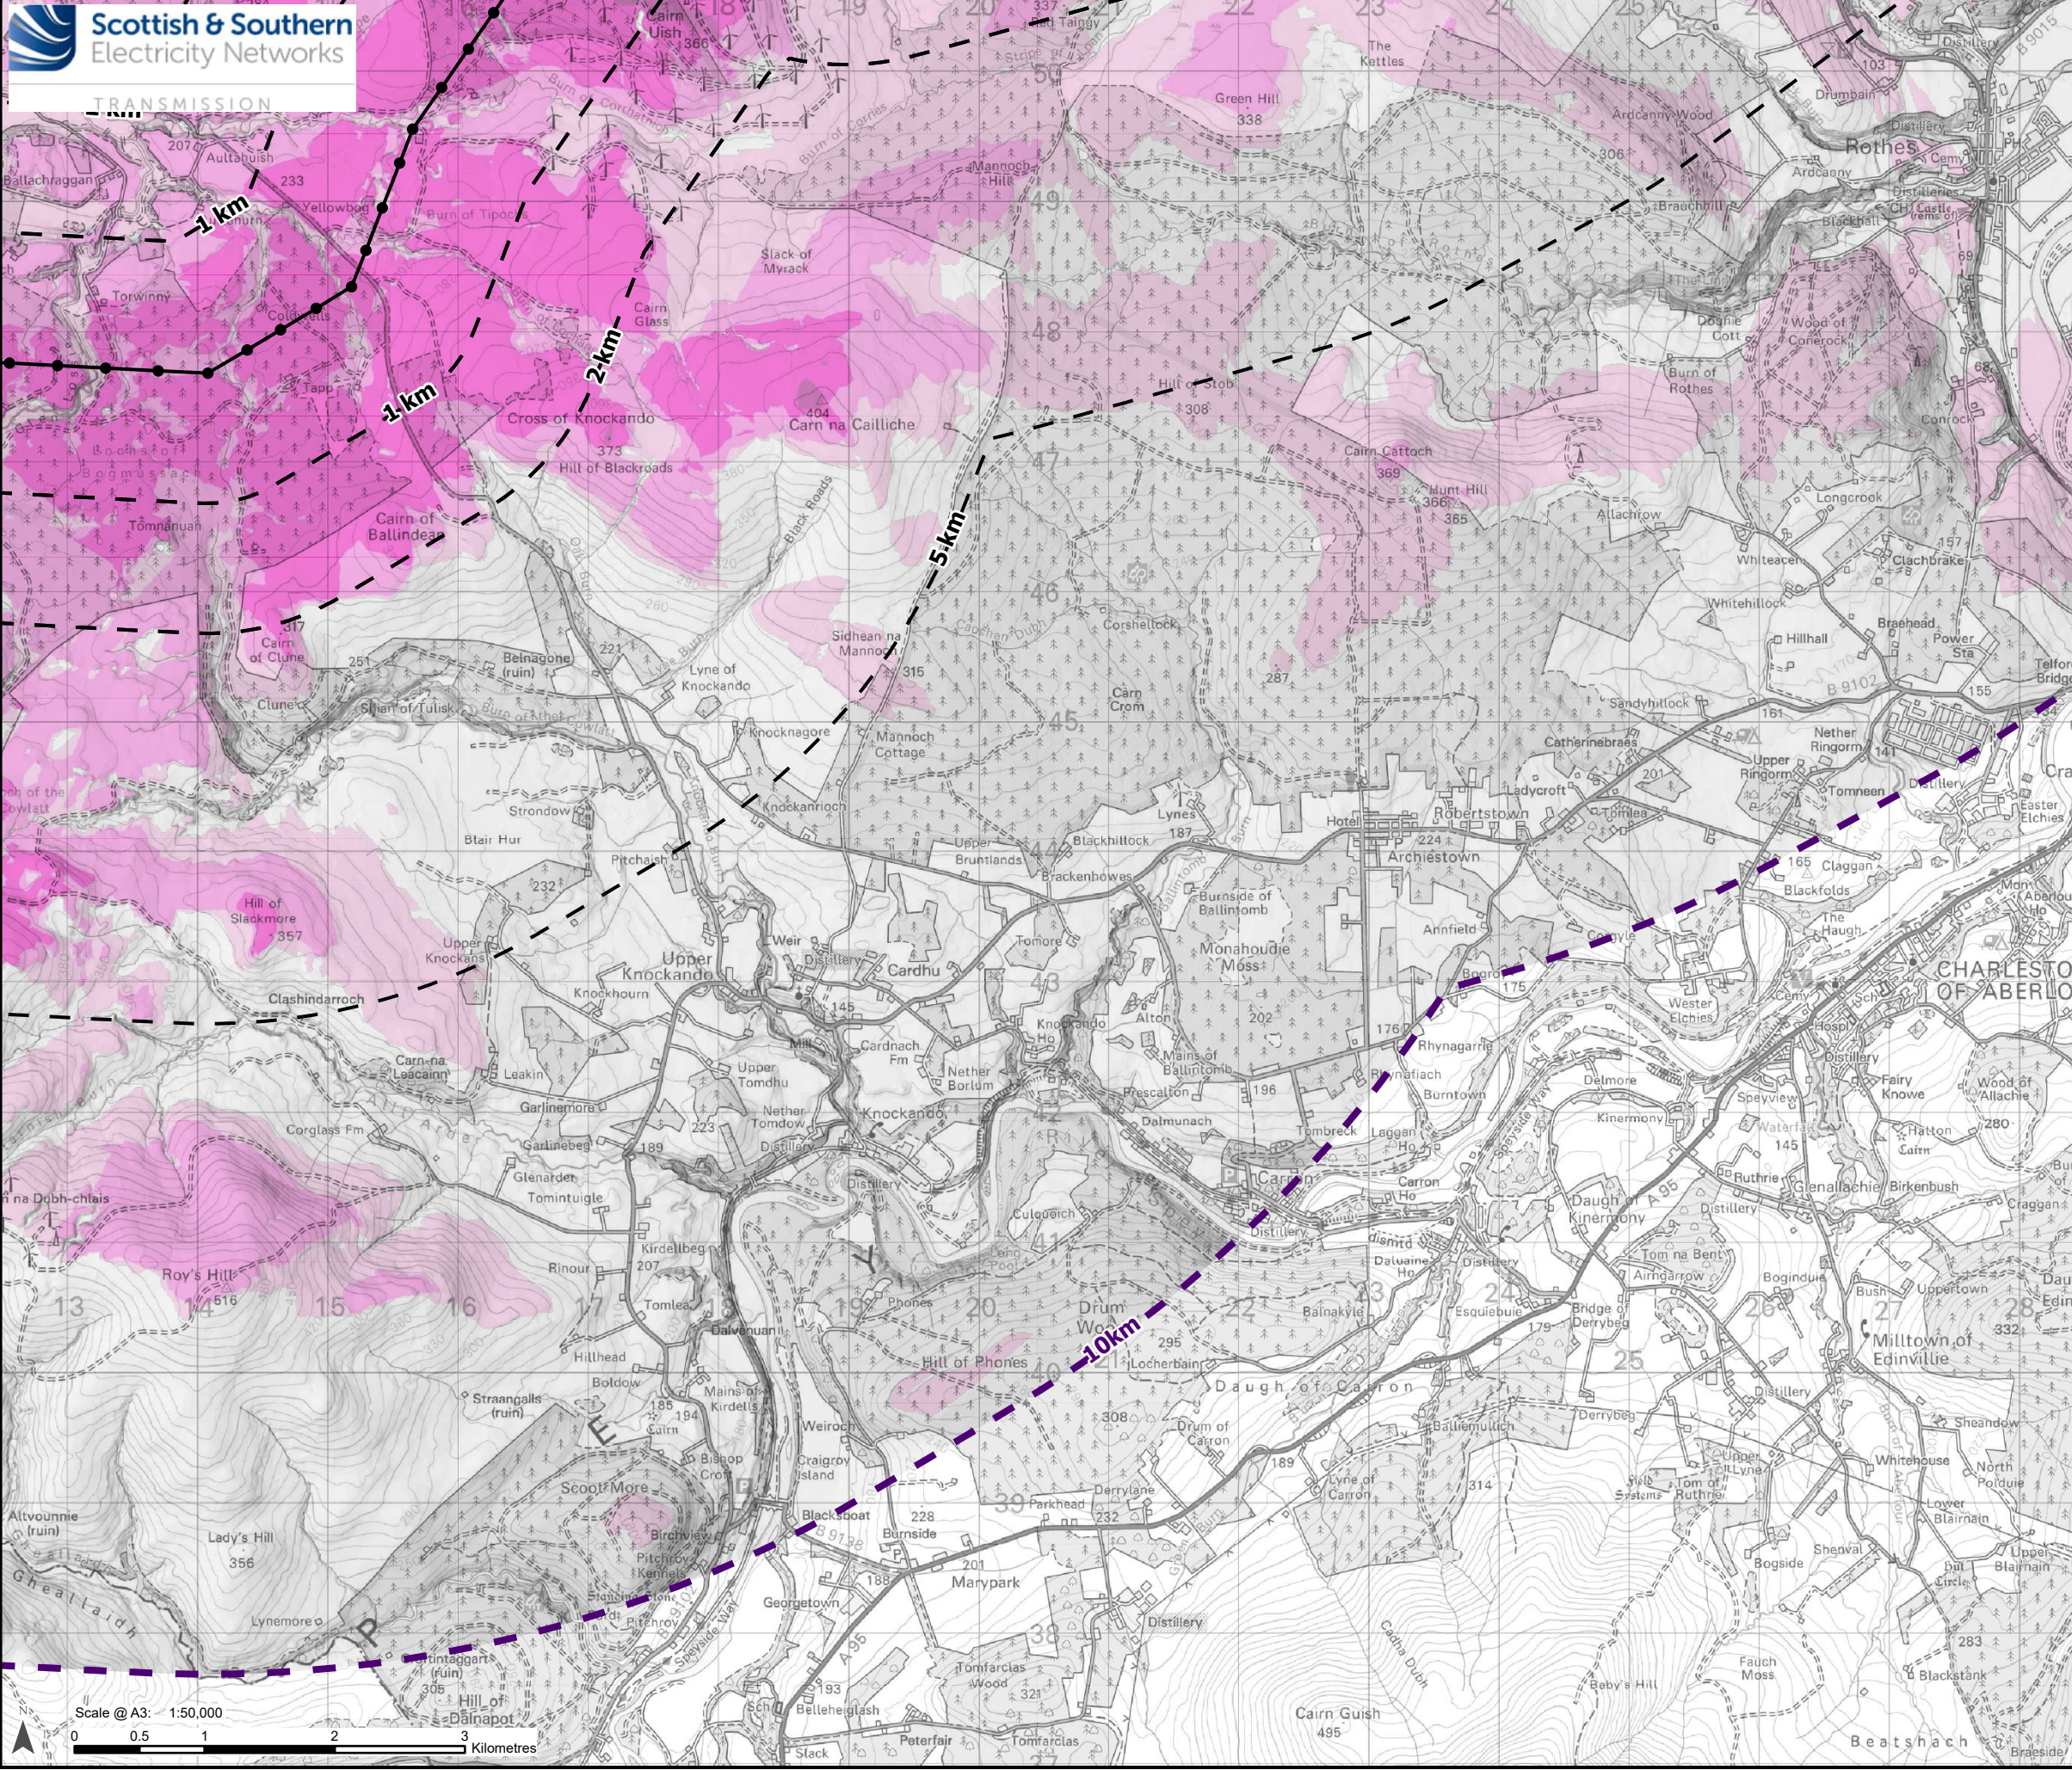

Legend

- 10 km LVIA Study Area
- Distance from Proposed Alignment : 1 km, 2 km, 5 km

Development for which Section 37  
Consent is Sought


- Proposed OHL Alignment - 400 kV
- Proposed Tower - 400 kV

Zone of Theoretical Visibility (ZTV)  
(Number of Towers Visible)



ZTV Note:

- 1) The theoretical visibility is based on the design heights of the proposed towers (14.65 m – 96.57 m) of the proposed OHL alignment, including transposition towers. The assumed viewer eye height is 2 m above ground level. The visibility of these towers is cut off at 10 km each.
- 2) The digital elevation model assumes bare ground and is derived from OS Terrain 5 data. The ZTV does not take into consideration intervening vegetation and built forms. This presents a worst-case scenario.
- 3) Earth curvature and atmosphere refraction have been taken into account.
- 4) The ZTV is based on the Design Freeze 4 and does not take into account the proposed towers for the Kellas Alternative Alignment.
- 5) Refer to **Section 7.2 of Chapter 7: Landscape and Visual** for ZTV creation methodology.

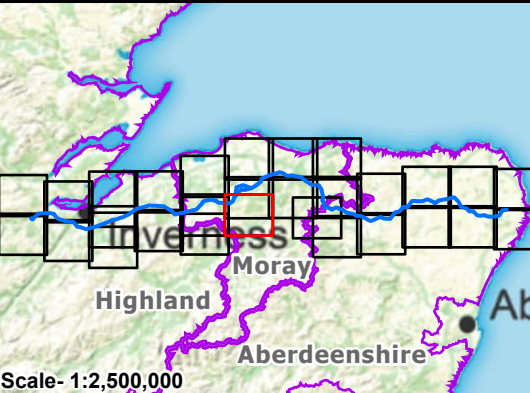


Reproduced by permission of Ordnance Survey.  
Crown copyright and database right 2025 all rights reserved.  
Ordnance Survey Licence number AC0000813445.  
**SSEN Transmission take no responsibility for the release or accuracy of latest version Basemaps from Ordnance Survey**

Project: Beauly to Blackhillock to New Deer to Peterhead 400 kV OHL Project

Title: Figure 7.1 - Zone of Theoretical Visibility  
10 km LVIA Study Area- Bare Earth  
Page 15 of 29

Drawn by: MAL Date: 12/09/2025

Drawing: B2P-WSP-DA-70092380-117

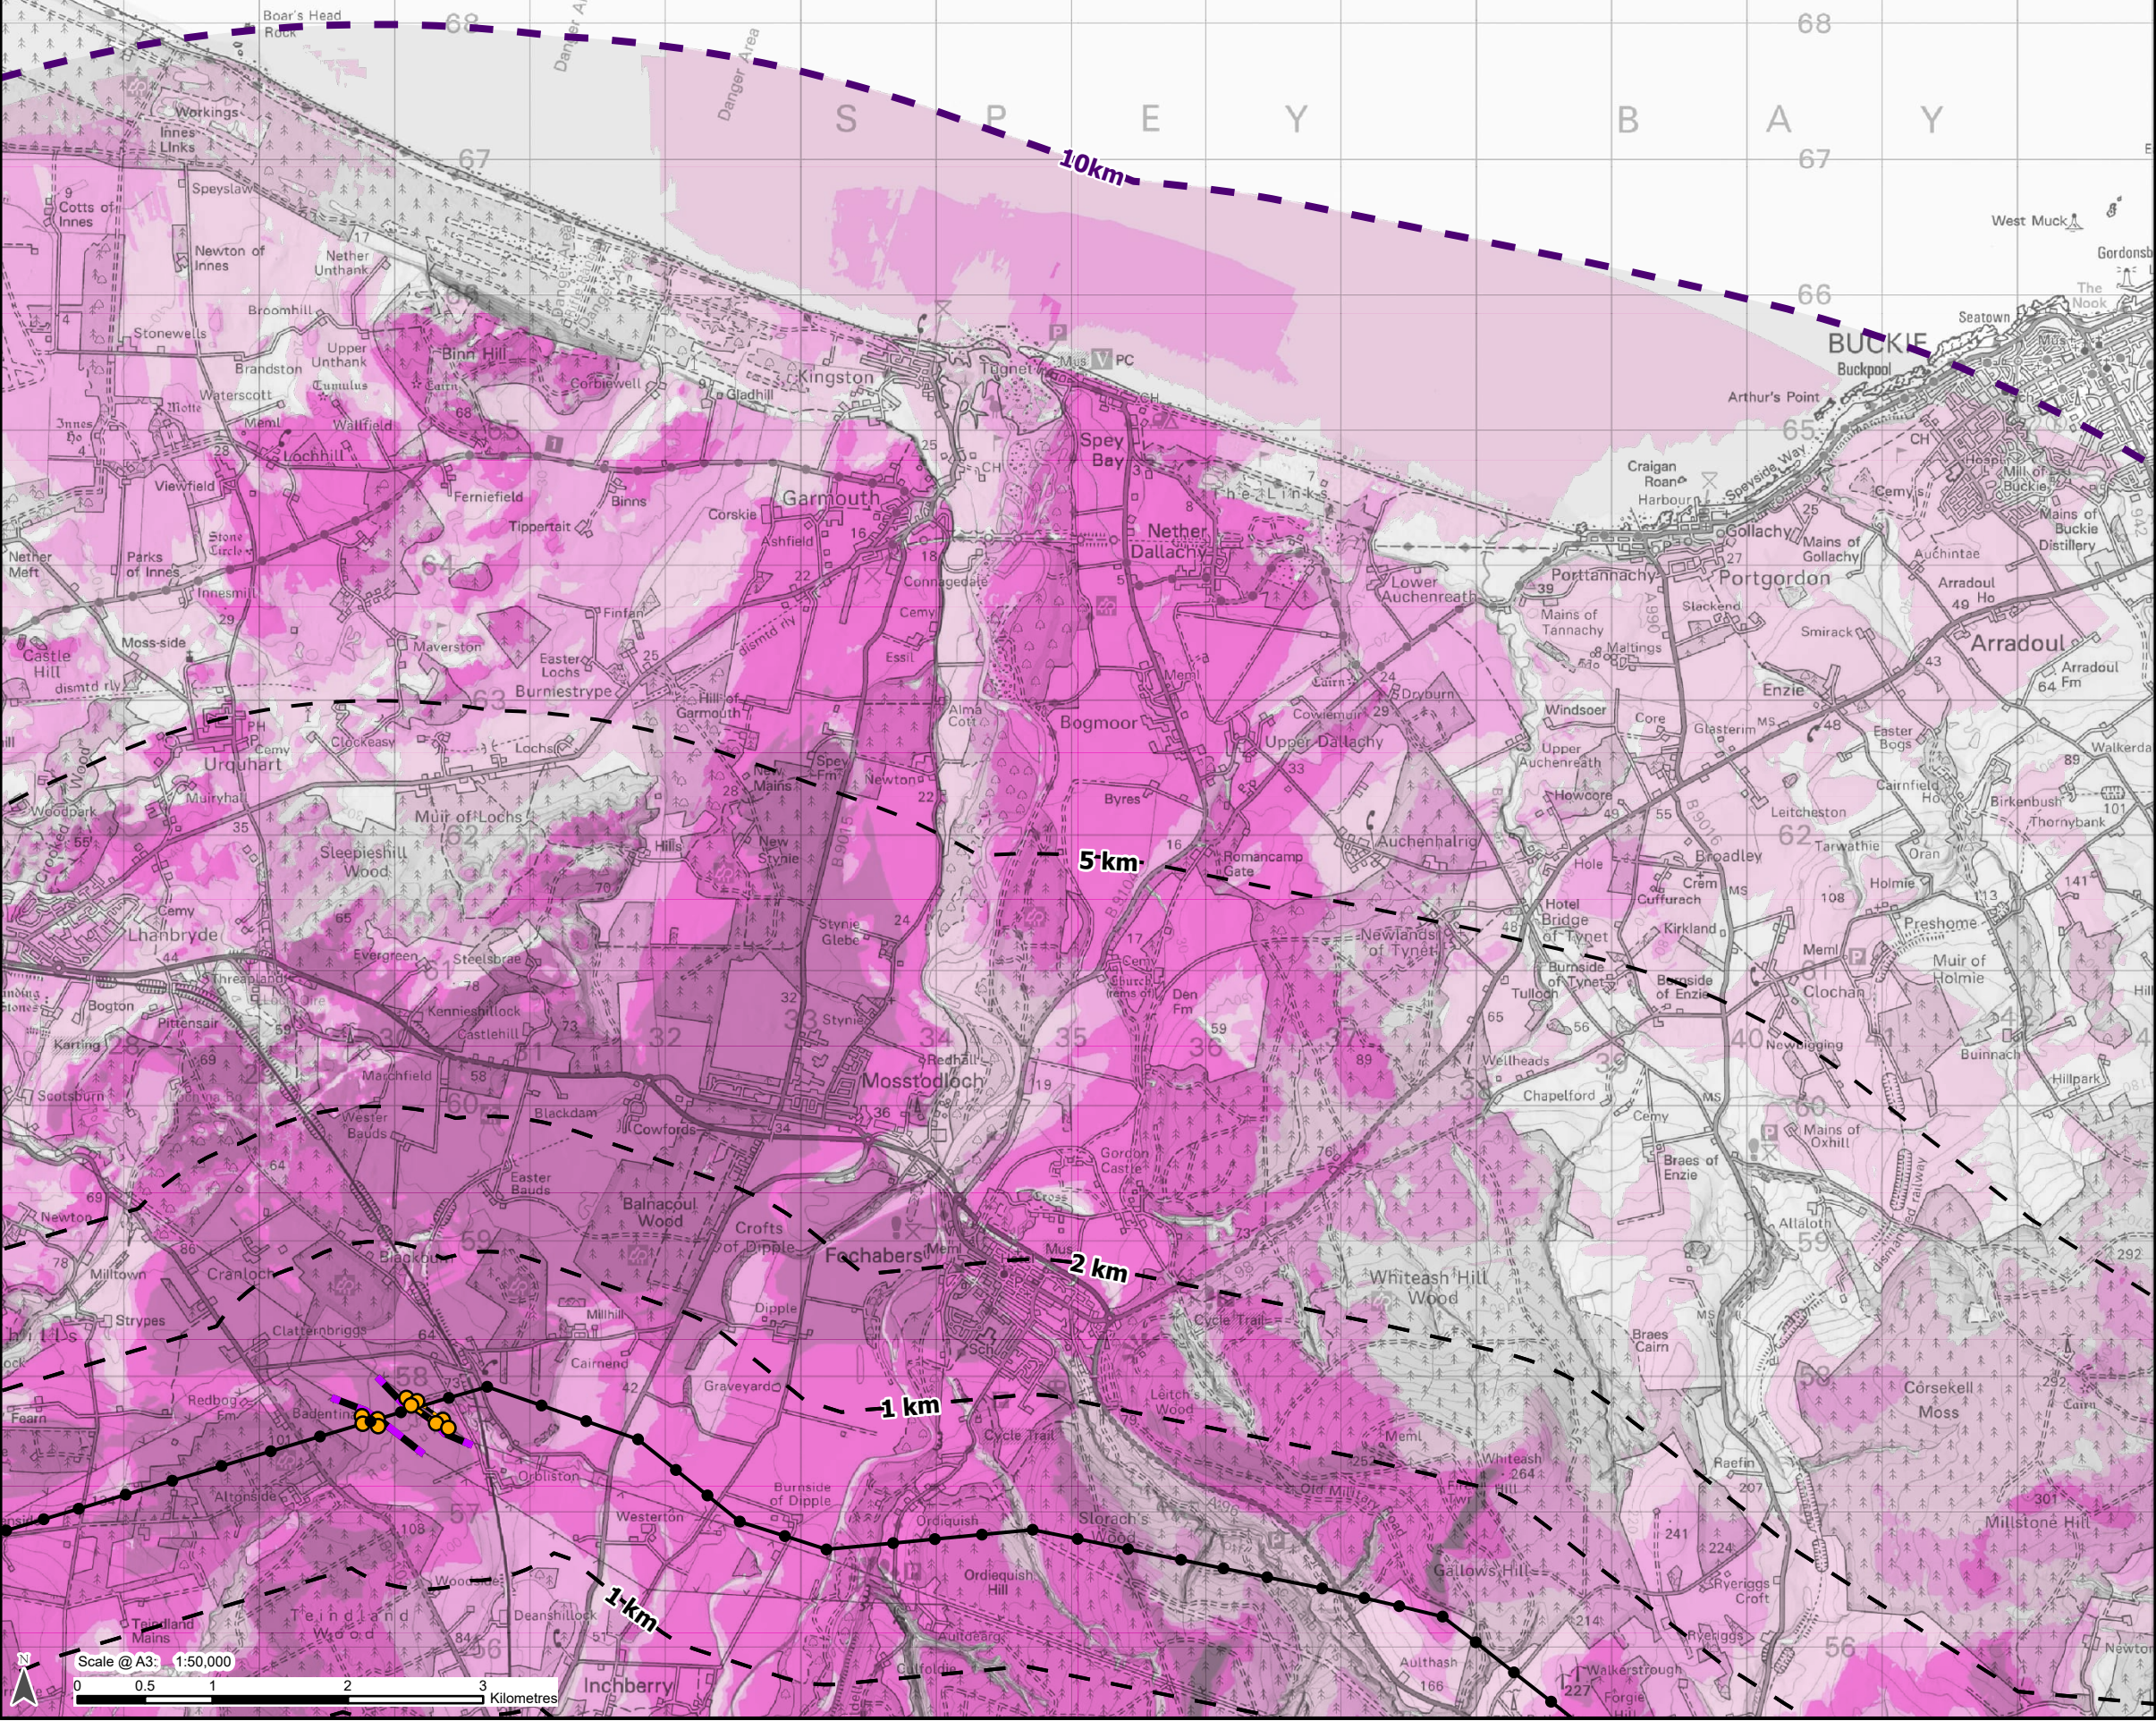

Legend

- 10 km LVIA Study Area
- Distance from Proposed Alignment : 1 km, 2 km, 5 km
- Proposed OHL Alignment - 400 kV
- Temporary OHL Diversion
- Proposed Alignment - Existing OHL Works (275 kV Realignment and Crossings)
- Proposed Tower - 400 kV
- Proposed Tower - Existing OHL Works (275 kV Realignment and Crossing)


Zone of Theoretical Visibility (ZTV)

(Number of Towers Visible)



ZTV Note:

- 1) The theoretical visibility is based on the design heights of the proposed towers (14.65 m – 96.57 m) of the proposed OHL alignment, including transposition towers. The assumed viewer eye height is 2 m above ground level. The visibility of these towers is cut off at 10 km each.
- 2) The digital elevation model assumes bare ground and is derived from OS Terrain 5 data. The ZTV does not take into consideration intervening vegetation and built forms. This presents a worst-case scenario.
- 3) Earth curvature and atmosphere refraction have been taken into account.
- 4) The ZTV is based on the Design Freeze 4 and does not take into account the proposed towers for the Kellas Alternative Alignment.
- 5) Refer to **Section 7.2 of Chapter 7: Landscape and Visual** for ZTV creation methodology.

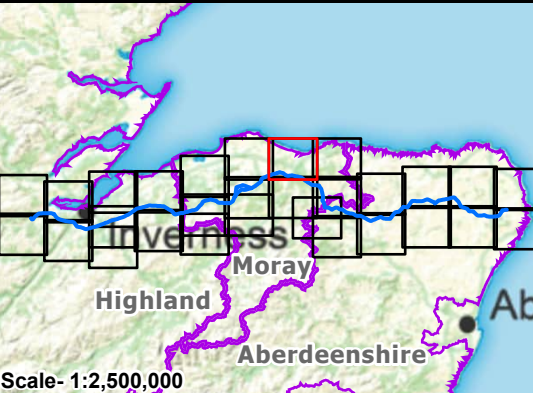

Reproduced by permission of Ordnance Survey.  
Crown copyright and database right 2025 all rights reserved.  
Ordnance Survey Licence number AC0000813445.  
SSEN Transmission take no responsibility for the release or accuracy of latest version Basemaps from Ordnance Survey

Project: Beaulieu to Blackhillock to New Deer to Peterhead 400 kV OHL Project

Title: Figure 7.1 - Zone of Theoretical Visibility  
10 km LVIA Study Area- Bare Earth  
Page 16 of 29

Drawn by: MAL Date: 12/09/2025

Drawing: B2P-WSP-DA-70092380-117