


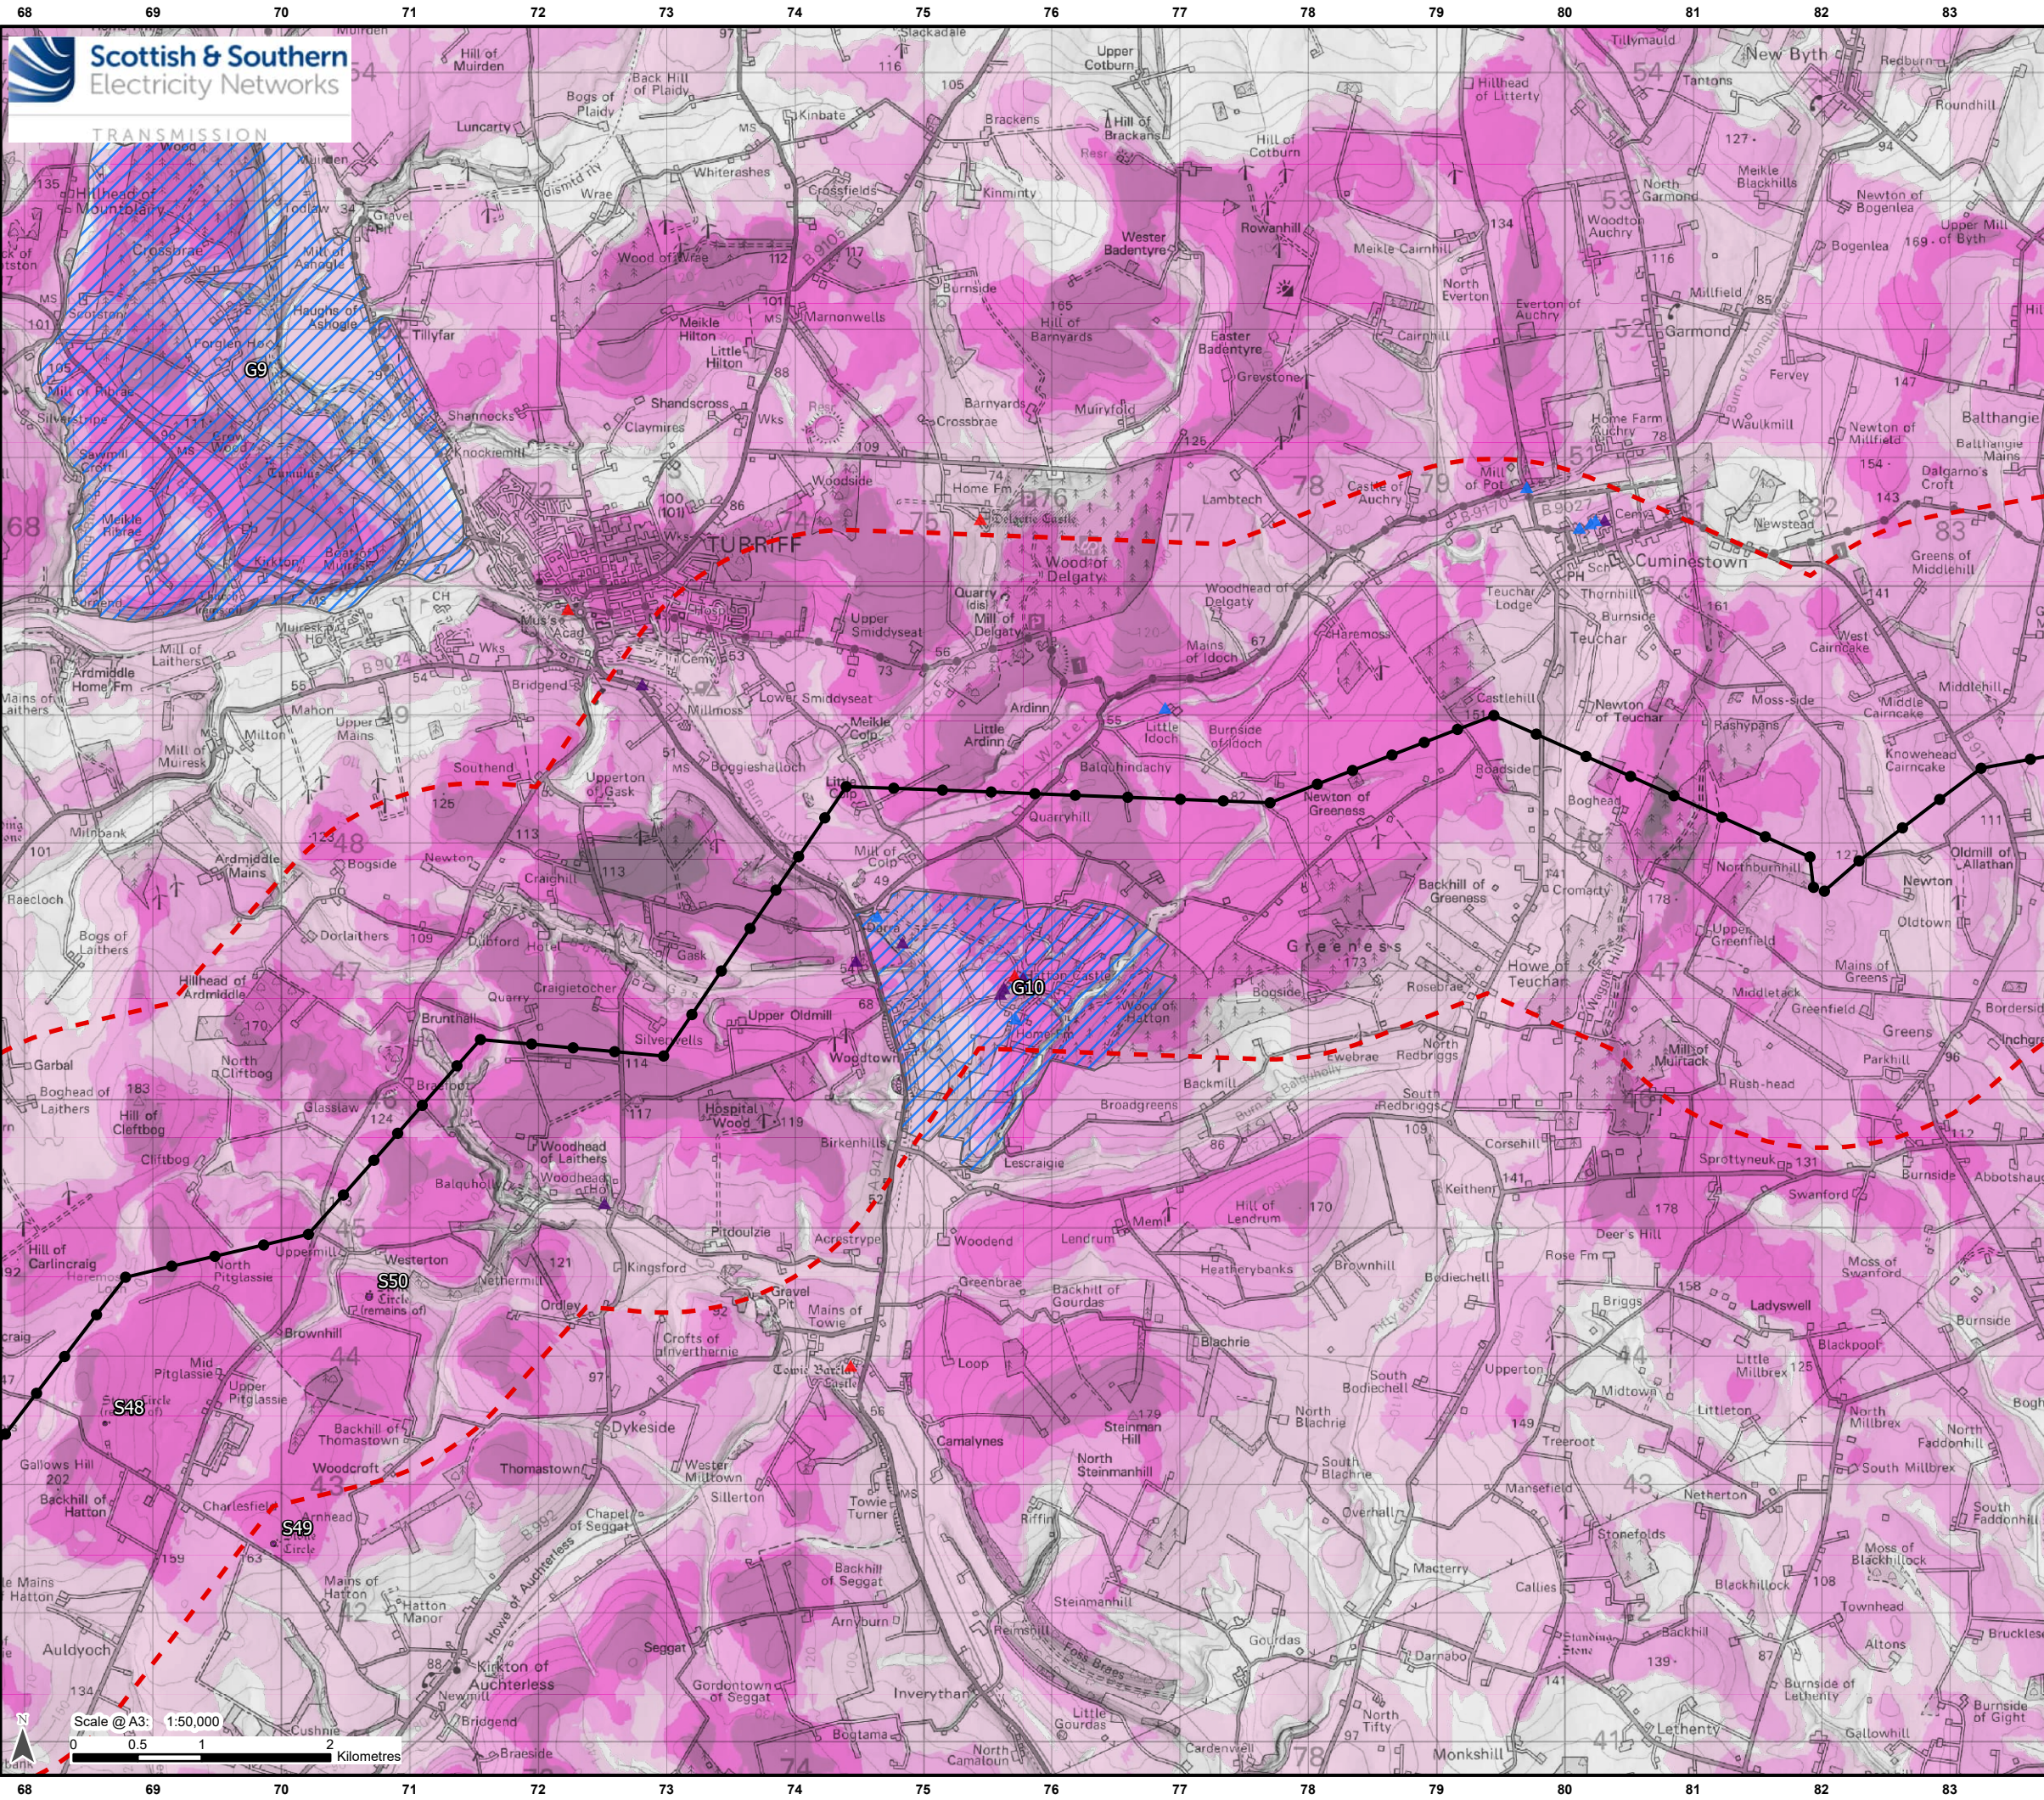

Legend

2 km Study Area

Development for which Section 37 Consent is Sought

Proposed OHL Alignment - 400 kV

Proposed Tower - 400 kV

Designated Heritage Assets

Gardens and Designed Landscape

Scheduled Monument


Listed Building Category A

Listed Building Category B

Listed Building Category C


Zone of Theoretical Visibility (ZTV)

(Number of Towers Visible)



ZTV Note:

- 1) The theoretical visibility is based on the design heights of the proposed towers (14.65 m – 96.57 m) of the proposed OHL alignment, including transposition towers. The assumed viewer eye height is 2 m above ground level. The visibility of these towers is cut off at 10 km each.
- 2) The digital elevation model assumes bare ground and is derived from OS Terrain 5 data. The ZTV does not take into consideration intervening vegetation and built forms. This presents a worst-case scenario.
- 3) Earth curvature and atmosphere refraction have been taken into account.
- 4) The ZTV is based on the Design Freeze 4 and does not take into account the proposed towers for the Kellas Alternative Alignment.
- 5) Refer to Section 7.2 of Chapter 7: Landscape and Visual for ZTV creation methodology.

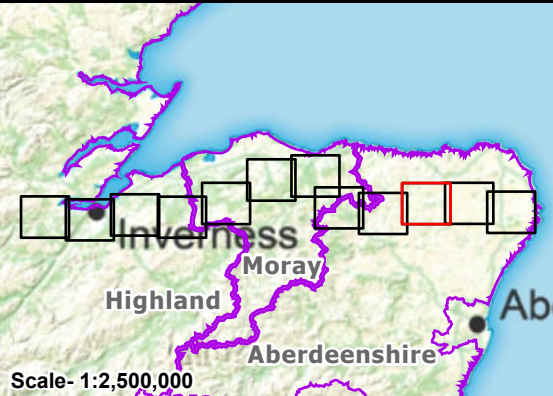


Reproduced by permission of Ordnance Survey. © Crown copyright and database right 2025. Ordnance Survey Licence number AC0000813445. Contains Historic Environment Scotland and Ordnance Survey data. © Historic Environment Scotland - Scottish Charity No. SC045925. © Crown copyright and database right 2025. SSSEN Transmission take no responsibility for the release or accuracy of latest version Basemaps from Ordnance Survey

Project: Beaulieu to Blackhillock to New Deer to Peterhead 400 kV OHL Project

Title: Figure 11.3 - Designated Heritage Assets and Zone of Theoretical Visibility
Page 10 of 12

Drawn by: MAL Date: 12/09/2025

Drawing: B2P-WSP-DA-70092380-140

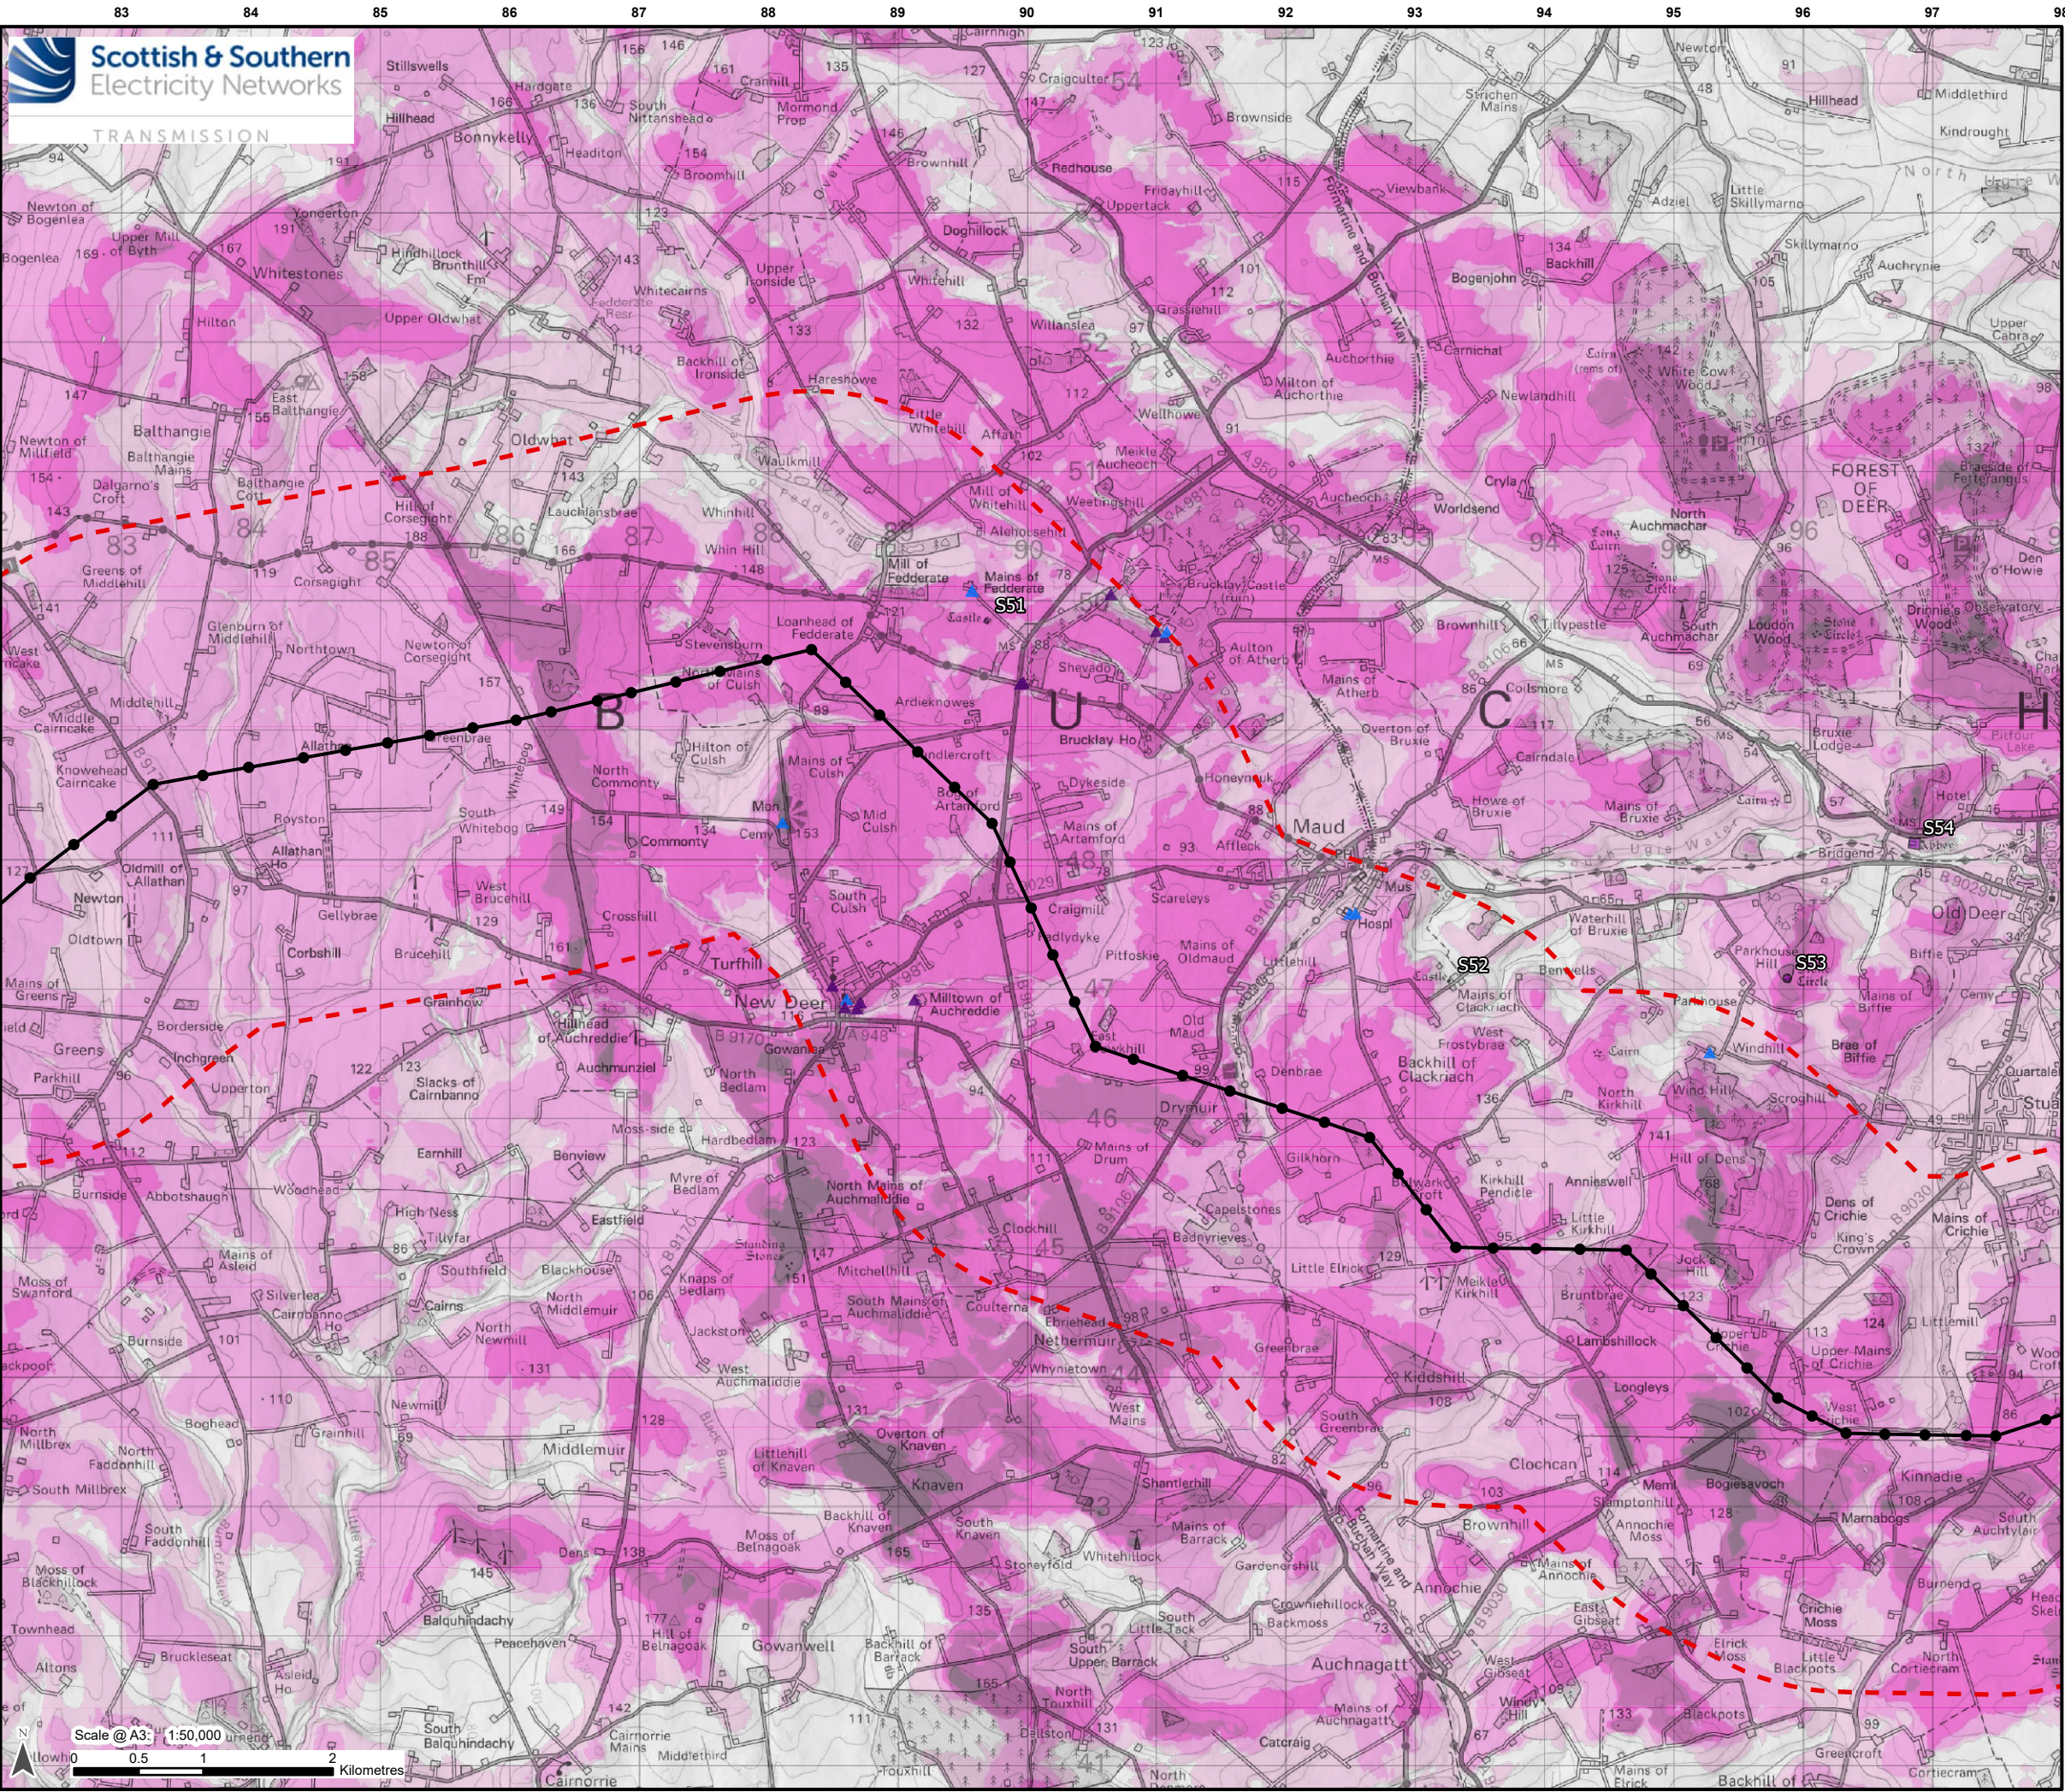

Legend

2 km Study Area

Development for which Section 37 Consent is Sought

Proposed OHL Alignment - 400 kV

Proposed Tower - 400 kV

Designated Heritage Assets


Scheduled Monument

Listed Building Category B

Listed Building Category C


Zone of Theoretical Visibility (ZTV)

(Number of Towers Visible)



ZTV Note:

- 1) The theoretical visibility is based on the design heights of the proposed towers (14.65 m – 96.57 m) of the proposed OHL alignment, including transposition towers. The assumed viewer eye height is 2 m above ground level. The visibility of these towers is cut off at 10 km each.
- 2) The digital elevation model assumes bare ground and is derived from OS Terrain 5 data. The ZTV does not take into consideration intervening vegetation and built forms. This presents a worst-case scenario.
- 3) Earth curvature and atmosphere refraction have been taken into account.
- 4) The ZTV is based on the Design Freeze 4 and does not take into account the proposed towers for the Kellas Alternative Alignment.
- 5) Refer to Section 7.2 of Chapter 7: Landscape and Visual for ZTV creation methodology.

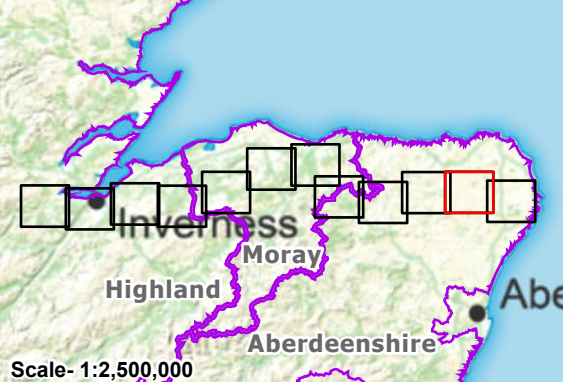


Reproduced by permission of Ordnance Survey. © Crown copyright and database right 2025. Ordnance Survey licence number AC0000813445. Contains Historic Environment Scotland and Ordnance Survey data. © Historic Environment Scotland - Scottish Charity No. SC045925. © Crown copyright and database right 2025. SSSEN Transmission take no responsibility for the release or accuracy of latest version Basemaps from Ordnance Survey

Project: Beaulieu to Blackhillock to New Deer to Peterhead 400 kV OHL Project

Title: Figure 11.3 - Designated Heritage Assets and Zone of Theoretical Visibility
Page 11 of 12

Drawn by: MAL **Date:** 12/09/2025

Drawing: B2P-WSP-DA-70092380-140

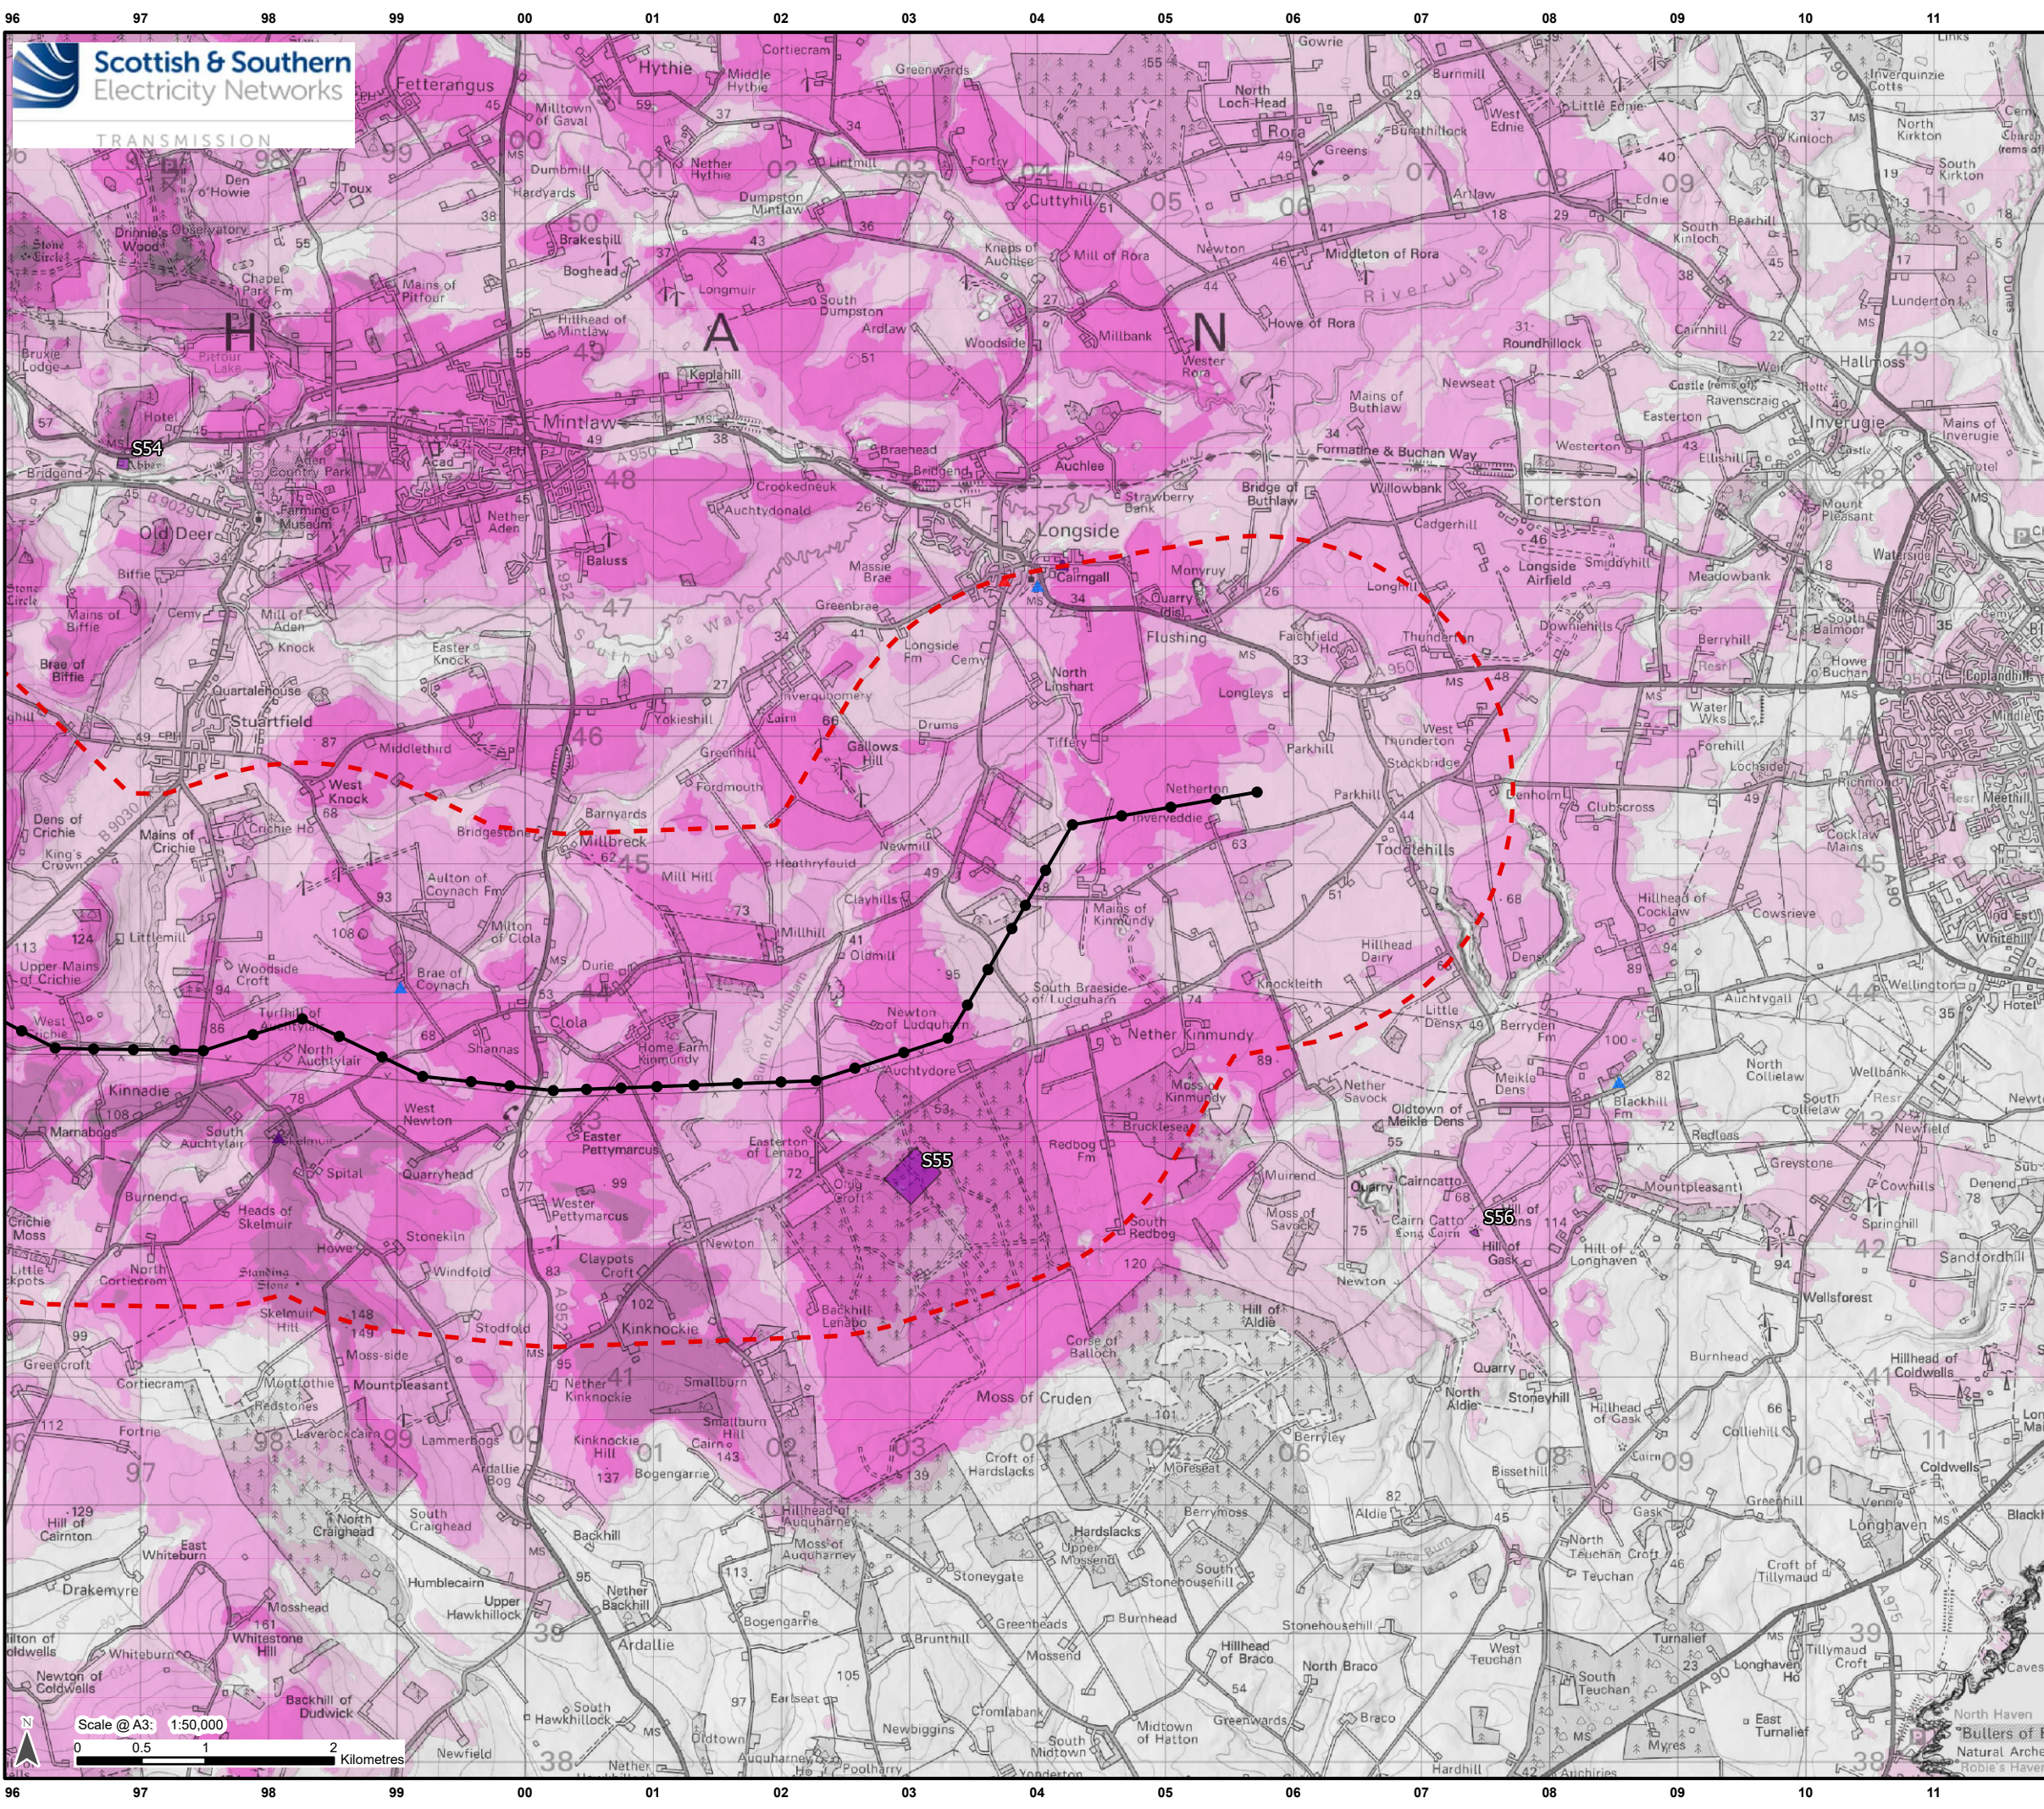

Legend

2 km Study Area

Proposed OHL Alignment - 400 kV

Proposed Tower - 400 kV

Designated Heritage Assets

Scheduled Monument

Listed Building Category A

Listed Building Category B

Listed Building Category C

Zone of Theoretical Visibility (ZTV)

(Number of Towers Visible)

1-15 15-30 30-45 45-60 60-71

ZTV Note:

- 1) The theoretical visibility is based on the design heights of the proposed towers (14.65 m – 96.57 m) of the proposed OHL alignment, including transposition towers. The assumed viewer eye height is 2 m above ground level. The visibility of these towers is cut off at 10 km each.
- 2) The digital elevation model assumes bare ground and is derived from OS Terrain 5 data. The ZTV does not take into consideration intervening vegetation and built forms. This presents a worst-case scenario.
- 3) Earth curvature and atmosphere refraction have been taken into account.
- 4) The ZTV is based on the Design Freeze 4 and does not take into account the proposed towers for the Kellas Alternative Alignment.
- 5) Refer to **Section 7.2 of Chapter 7: Landscape and Visual** for ZTV creation methodology.

Scale- 1:2,500,000

Reproduced by permission of Ordnance Survey. © Crown copyright and database right 2025. Ordnance Survey licence number AC0000813445. Contains Historic Environment Scotland and Ordnance Survey data. © Historic Environment Scotland - Scottish Charity No. SC045925. © Crown copyright and database right 2025. SSSEN Transmission take no responsibility for the release or accuracy of latest version Basemaps from Ordnance Survey

Project: Beaulieu to Blackhillock to New Deer to Peterhead 400 kV OHL Project

Title: Figure 11.3 - Designated Heritage Assets and Zone of Theoretical Visibility
Page 12 of 12

Drawn by: MAL **Date:** 12/09/2025

Drawing: B2P-WSP-DA-70092380-140