


# Location Plan

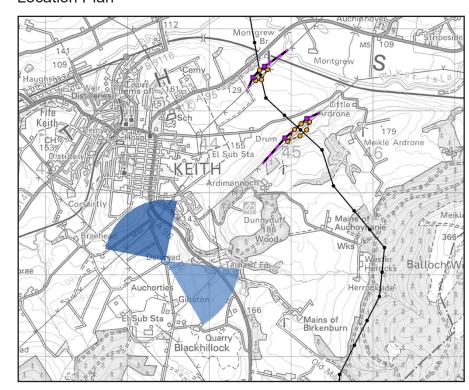

Visualisation 7.33a Viewpoint 33: Blackhillock View northwest from Denwell Road Blackhillock, to the south of Keith. Beauly to Blackhillock to New Deer to Peterhead 400 kV OHL Project

# Key

- Proposed Tower 400 kV
- Proposed Tower Existing OHL Works (275 kV
- Realignment and Crossing)
- Proposed Tower Temporary Proposed OHL Alignment 400 kV
- Temporary OHL Diversion Proposed Alignment - Existing OHL Works
- (275 kV Realignment and Crossings)
- 90° Field of View

53.5° Field of View

- -The following images provide landscape and visual context only.
- -View photomontages flat and at a comfortable arm's length. If viewing these images on a wall or board at an exhibition, you should stand at arm's length from the image presented.
  - -A visualisation can never show exactly what the Proposed Development will look like in reality due to factors such as: different lighting, weather and seasonal conditions which vary through time and the resolution of the
  - -The images provided give a reasonable impression of the scale of the towers and the distance to the towers, but can never be 100% accurate.
  - -To form the best impression of the impacts of the proposal these images are best viewed at the viewpoint
  - -The viewpoints illustrated are representative of views in the area, but cannot represent visibility at all locations.
  - -The images must be printed at the right size to be viewed properly (260mm by 820mm).
  - -If viewing photomontages on screen enlarge to full screen to gain an overview, enlarge to 100% to have a reasonable impression of the size of the development in the view.
  - -Vertical Limit of Deviation: the maximum height of a tower above ground level.
  - -The following images are type 3 visualisations and have been produced in accordance with Landscape Institute Technical Guidance Note 06/19 and NatureScot - Visual Representation of Wind Farms Guidance Version 2.2 - February 2017.

OS reference:

Direction of view:

Distance to Development: 1342 m

Eye Level:

# Representative of:

Residential receptors: the settlement of Keith (MOR-R-50, MOR-R-55, MOR-R-56).

Recreational & Amenity receptors: users of Core Paths to south of Keith (MOR-REC-21).

<u>Transport receptors:</u> users of the A96, including tourists (MOR-T-7); and users of local roads (MOR-T-8).

This visualisation has been identified and created for use with the visual impact assessment, but can also be used to inform landscape impacts on LCT288 Upland Farmland.

For visual receptor and viewpoint locations refer to Volume 3: Figure 7.6 Visual Amenity Receptors and Viewpoint Locations and Figure 7.7 Visual Context.

343478 849183

183.66 m AOD

326°

Representative Viewpoint Viewpoint Type: Visualisation Type: Type 3 Enlargement Factor: 96% @ A3 extended Principal distance: 812.5 mm

Horizontal field of view: 90° (cylindrical projection) Vertical Field of View: 13.5° 841 x 297 mm Paper size: Correct printed image size: 820 x 130 mm

Camera:





Visualisation 7.33b Viewpoint 33: Blackhillock

Beauly to Blackhillock to New Deer to Peterhead 400 kV OHL Project

OS reference: Eye Level: Direction of view: Distance to Development: 1342 m

343478 849183 183.66 m AOD 326°

Viewpoint Type: Representative Viewpo Visualisation Type: Type 3 Enlargement Factor: 96% @ A3 extended Principal distance: 812.5 mm Representative Viewpoint

Horizontal field of view: Vertical Field of View: Paper size: 841 x 297 mm
Correct printed image size: 820 x 130 mm





Visualisation 7.33c Viewpoint 33: Blackhillock

Beauly to Blackhillock to New Deer to Peterhead 400 kV OHL Project


OS reference: 343478 8
Eye Level: 183.66 m
Direction of view: 326°
Distance to Development: 1342 m

343478 849183 183.66 m AOD


Viewpoint Type: Representative Viewpoint
Visualisation Type: Type 3
Enlargement Factor: 96% @ A3 extended
Principal distance: 812.5 mm

Horizontal field of view: Vertical Field of View: Paper size: 841 x 297 mm
Correct printed image size: 820 x 260 mm



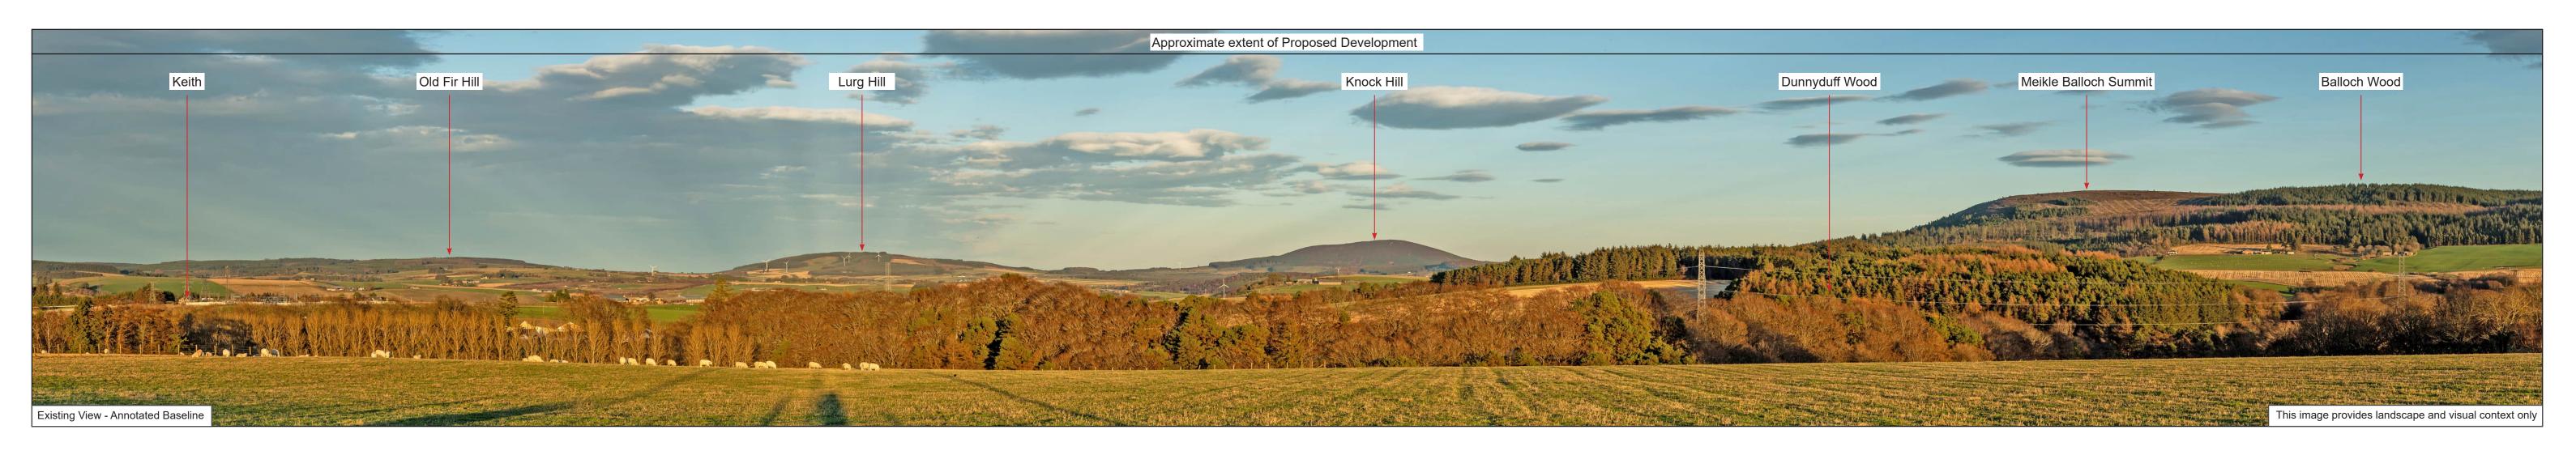

# Location Plan

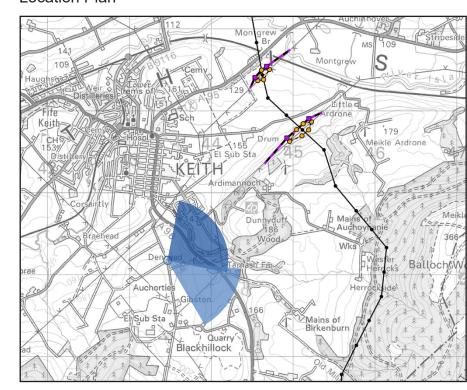

Visualisation 7.33d
Viewpoint 33: Blackhillock
View northeast from Denwell Road Blackhillock, to the south of Keith.

Beauly to Blackhillock to New Deer to Peterhead 400 kV OHL Project

# Key

- Proposed Tower 400 kV
- Proposed Tower Existing OHL Works (275 kV
- Realignment and Crossing)
- Proposed Tower Temporary
  - Proposed OHL Alignment 400 kV
- Temporary OHL Diversion
- Proposed Alignment Existing OHL Works
  (275 kV Realignment and Crossings)
- 90° Field of View

53.5° Field of View

### Noto

- -The following images provide landscape and visual context only.
- -View photomontages flat and at a comfortable arm's length. If viewing these images on a wall or board at an exhibition, you should stand at arm's length from the image presented.
  - -A visualisation can never show exactly what the Proposed Development will look like in reality due to factors such as: different lighting, weather and seasonal conditions which vary through time and the resolution of the
  - -The images provided give a reasonable impression of the scale of the towers and the distance to the towers, but can never be 100% accurate.
  - -To form the best impression of the impacts of the proposal these images are best viewed at the viewpoint location shown.
  - -The viewpoints illustrated are representative of views in the area, but cannot represent visibility at all locations.
  - -The images must be printed at the right size to be viewed properly (260mm by 820mm).
  - -If viewing photomontages on screen enlarge to full screen to gain an overview, enlarge to 100% to have a reasonable impression of the size of the development in the view.

OS reference:

Direction of view:

Distance to Development: 1342 m

Eye Level:

- -Vertical Limit of Deviation: the maximum height of a tower above ground level.
- -The following images are type 3 visualisations and have been produced in accordance with Landscape Institute Technical Guidance Note 06/19 and NatureScot Visual Representation of Wind Farms Guidance Version 2.2 February 2017.

## Representative of:

Residential receptors: the settlement of Keith (MOR-R-50, MOR-R-55, MOR-R-56).

Recreational & Amenity receptors: users of Core Paths to south of Keith (MOR-REC-21).

<u>Transport receptors:</u> users of the A96, including tourists (MOR-T-7); and users of local roads (MOR-T-8).

This visualisation has been identified and created for use with the visual impact assessment, but can also be used to inform landscape impacts on LCT288 Upland Farmland.

For visual receptor and viewpoint locations refer to **Volume 3**: **Figure 7.6 Visual Amenity Receptors and Viewpoint Locations** and **Figure 7.7 Visual Context**.

343478 849183 Viewpoi 183.66 m AOD Visualis 56° Enlarge

Viewpoint Type: Representative Viewpoint Type 3
Enlargement Factor: Principal distance: Representative Viewpoint Type 3
96% @ A3 extended 812.5 mm

Horizontal field of view: 90° (cylindrical proventical Field of View: 13.5°
Paper size: 841 x 297 mm
Correct printed image size: 820 x 130 mm

90° (cylindrical projection) 13.5° 841 x 297 mm





Viewpoint 33: Blackhillock

Eye Level: Direction of view: Distance to Development: 1342 m

Viewpoint Type: Representative Viewpo Visualisation Type: Type 3 Enlargement Factor: 96% @ A3 extended Principal distance: 812.5 mm

Vertical Field of View: Paper size: 841 x 297 mm
Correct printed image size: 820 x 130 mm






Visualisation 7.33f Viewpoint 33: Blackhillock OS reference: 343478 8
Eye Level: 183.66 m
Direction of view: 56°
Distance to Development: 1342 m


Viewpoint Type: Representative Viewpo Visualisation Type: Type 3 Enlargement Factor: 96% @ A3 extended Principal distance: 812.5 mm

Horizontal field of view: Vertical Field of View: Paper size: 841 x 297 mm
Correct printed image size: 820 x 260 mm



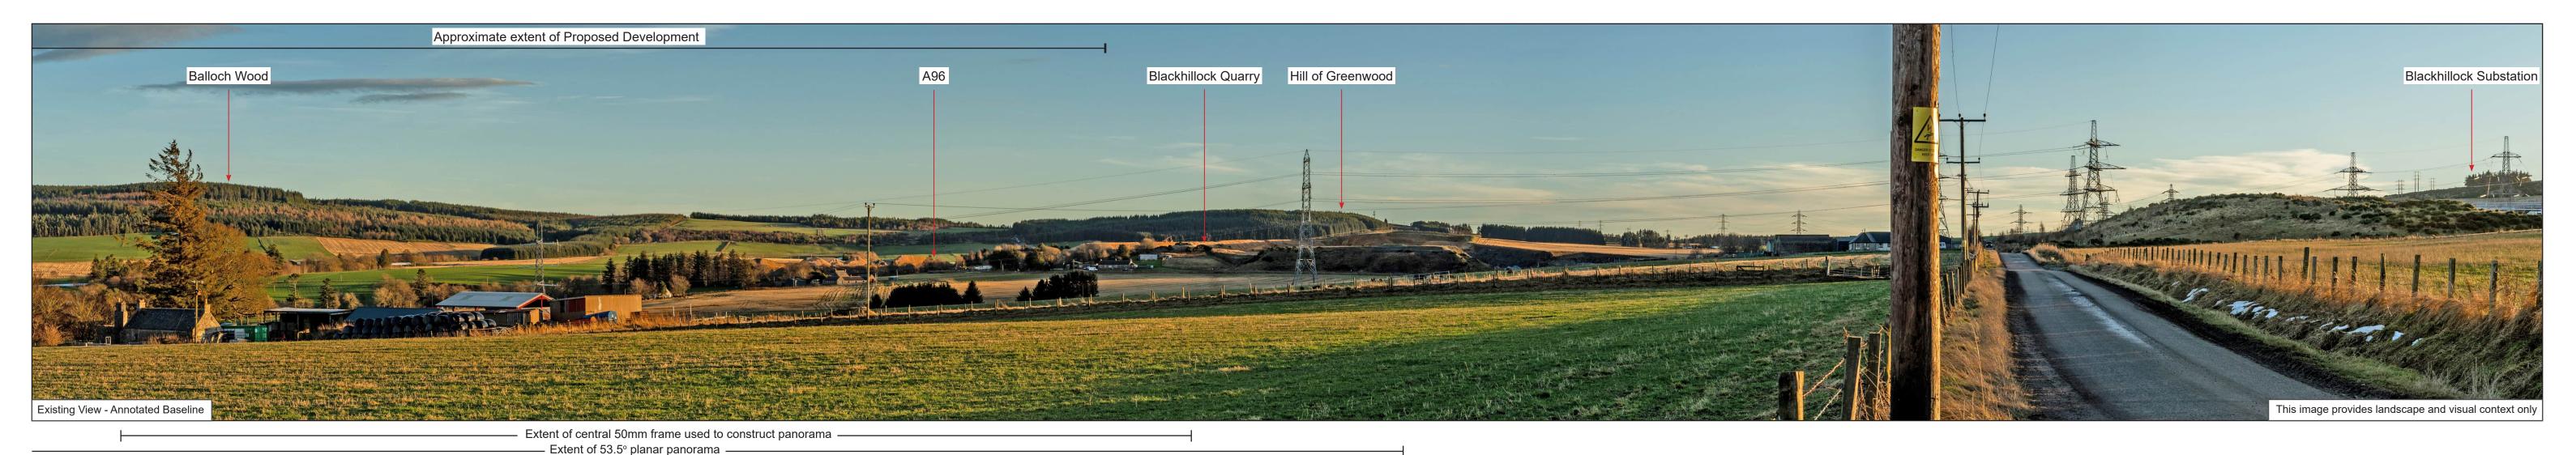

## **Location Plan**

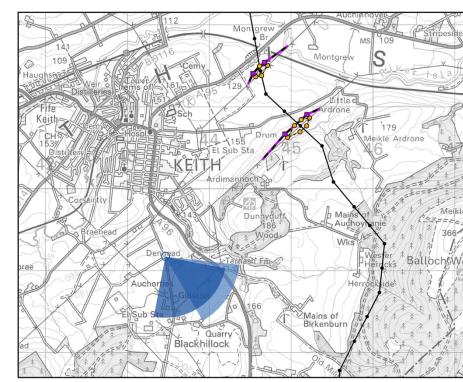

Visualisation 7.33g Viewpoint 33: Blackhillock View southeast from Denwell Road Blackhillock, to the south of Keith. Beauly to Blackhillock to New Deer to Peterhead 400 kV OHL Project

# Key

- Proposed Tower 400 kV
- Proposed Tower Existing OHL Works (275 kV
- Realignment and Crossing)
- Proposed Tower Temporary
- Proposed OHL Alignment 400 kV
- Temporary OHL Diversion Proposed Alignment - Existing OHL Works
- (275 kV Realignment and Crossings) 90° Field of View

## 53.5° Field of View

- -The following images provide landscape and visual context only.
- -View photomontages flat and at a comfortable arm's length. If viewing these images on a wall or board at an exhibition, you should stand at arm's length from the image presented.
- -A visualisation can never show exactly what the Proposed Development will look like in reality due to factors such as: different lighting, weather and seasonal conditions which vary through time and the resolution of the
- -The images provided give a reasonable impression of the scale of the towers and the distance to the towers, but can never be 100% accurate.
- -To form the best impression of the impacts of the proposal these images are best viewed at the viewpoint
- -The viewpoints illustrated are representative of views in the area, but cannot represent visibility at all locations.
- -The images must be printed at the right size to be viewed properly (260mm by 820mm).
- -If viewing photomontages on screen enlarge to full screen to gain an overview, enlarge to 100% to have a reasonable impression of the size of the development in the view.

OS reference:

Direction of view:

Distance to Development: 1342 m

Eye Level:

- -Vertical Limit of Deviation: the maximum height of a tower above ground level.
- -The following images are type 3 visualisations and have been produced in accordance with Landscape Institute Technical Guidance Note 06/19 and NatureScot - Visual Representation of Wind Farms Guidance Version 2.2 - February 2017.

Representative of:

Residential receptors: the settlement of Keith (MOR-R-50, MOR-R-55, MOR-R-56).

Recreational & Amenity receptors: users of Core Paths to south of Keith (MOR-REC-21).

<u>Transport receptors:</u> users of the A96, including tourists (MOR-T-7); and users of local roads (MOR-T-8).

This visualisation has been identified and created for use with the visual impact assessment, but can also be used to inform landscape impacts on LCT288 Upland Farmland.

For visual receptor and viewpoint locations refer to Volume 3: Figure 7.6 Visual Amenity Receptors and Viewpoint Locations and Figure 7.7 Visual Context.

343478 849183

183.66 m AOD

146°

Representative Viewpoint Viewpoint Type: Visualisation Type: Type 3 Enlargement Factor: 96% @ A3 extended Principal distance: 812.5 mm

Horizontal field of view: 90° (cylindrical projection) Vertical Field of View: 841 x 297 mm Paper size: Correct printed image size: 820 x 130 mm







Visualisation 7.33h Viewpoint 33: Blackhillock

Eye Level: Direction of view:

OS reference: Distance to Development: 1342 m

343478 849183 183.66 m AOD 146°

Viewpoint Type: Representative Viewpo Visualisation Type: Type 3 Enlargement Factor: 96% @ A3 extended Principal distance: 812.5 mm Representative Viewpoint

Horizontal field of view: Vertical Field of View: Paper size: 841 x 297 mm
Correct printed image size: 820 x 130 mm

90° (cylindrical projection) 13.5°

