




Location Plan

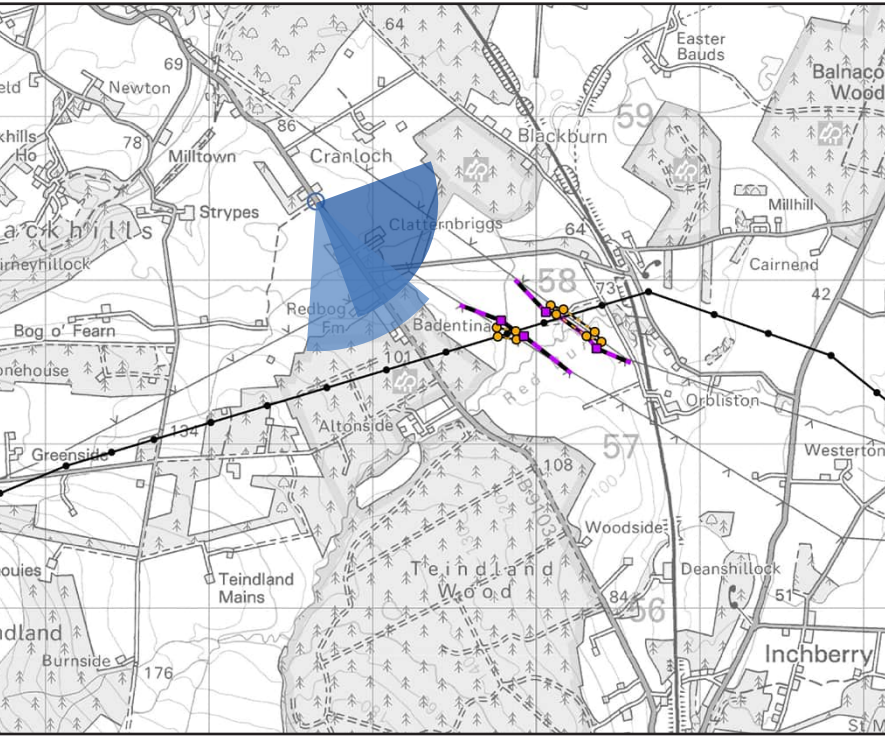

- Key
- Proposed Tower 400 kV
 - Proposed Tower - Existing OHL Works (275 kV)
 - Realignment and Crossing)
 - Proposed Tower - Temporary
 - Proposed OHL Alignment 400 kV
 - Temporary OHL Diversion
 - Proposed Alignment - Existing OHL Works (275 kV Realignment and Crossings)
 - 90° Field of View
 - 53.5° Field of View

Notes:

-The following images provide landscape and visual context only.

-View photomontages flat and at a comfortable arm's length. If viewing these images on a wall or board at an exhibition, you should stand at arm's length from the image presented.

-A visualisation can never show exactly what the Proposed Development will look like in reality due to factors such as: different lighting, weather and seasonal conditions which vary through time and the resolution of the image.

-The images provided give a reasonable impression of the scale of the towers and the distance to the towers, but can never be 100% accurate.

-To form the best impression of the impacts of the proposal these images are best viewed at the viewpoint location shown.

-The viewpoints illustrated are representative of views in the area, but cannot represent visibility at all locations.

-The images must be printed at the right size to be viewed properly (260mm by 820mm).

-If viewing photomontages on screen enlarge to full screen to gain an overview, enlarge to 100% to have a reasonable impression of the size of the development in the view.

-Vertical Limit of Deviation: the maximum height of a tower above ground level.

-The following images are type 3 visualisations and have been produced in accordance with Landscape Institute Technical Guidance Note 06/19 and NatureScot - Visual Representation of Wind Farms Guidance Version 2.2 - February 2017.

Representative of:

Residential receptors: residents in Cranloch (MOR-R-28, MOR-R-29, MOR-R-30, MOR-R-31).

Transport receptor: users of the B9103 (MOR-T-5).

This visualisation has been identified and created for use with the visual impact assessment, but can also be used to inform landscape impacts on LCT290 Upland Moorland and Forestry.

For visual receptor and viewpoint locations refer to **Volume 3: Figure 7.6 Visual Amenity Receptors and Viewpoint Locations** and **Figure 7.7 Visual Context**.

Visualisation 7.61a
Viewpoint 61: B9103, Cranloch
View southeast from the B9103 in Cranloch.
Beauly to Blackhillock to New Deer to Peterhead 400 kV OHL Project

OS reference:	328658 858475
Eye Level:	94.97 m AOD
Direction of view:	115°
Distance to Development:	1108 m

Viewpoint Type:	Representative Viewpoint
Visualisation Type:	Type 3
Enlargement Factor:	96% @ A3 extended
Principal distance:	812.5 mm


Horizontal field of view:	90° (cylindrical projection)
Vertical Field of View:	13.5°
Paper size:	841 x 297 mm
Correct printed image size:	820 x 130 mm

Camera:	Sony ILCE-7M4
Lens:	50 mm Fixed Focal Length
Camera Height:	1.5 m AGL
Date and time:	15/01/2025,12:54



Existing View - Baseline

This image provides landscape and visual context only

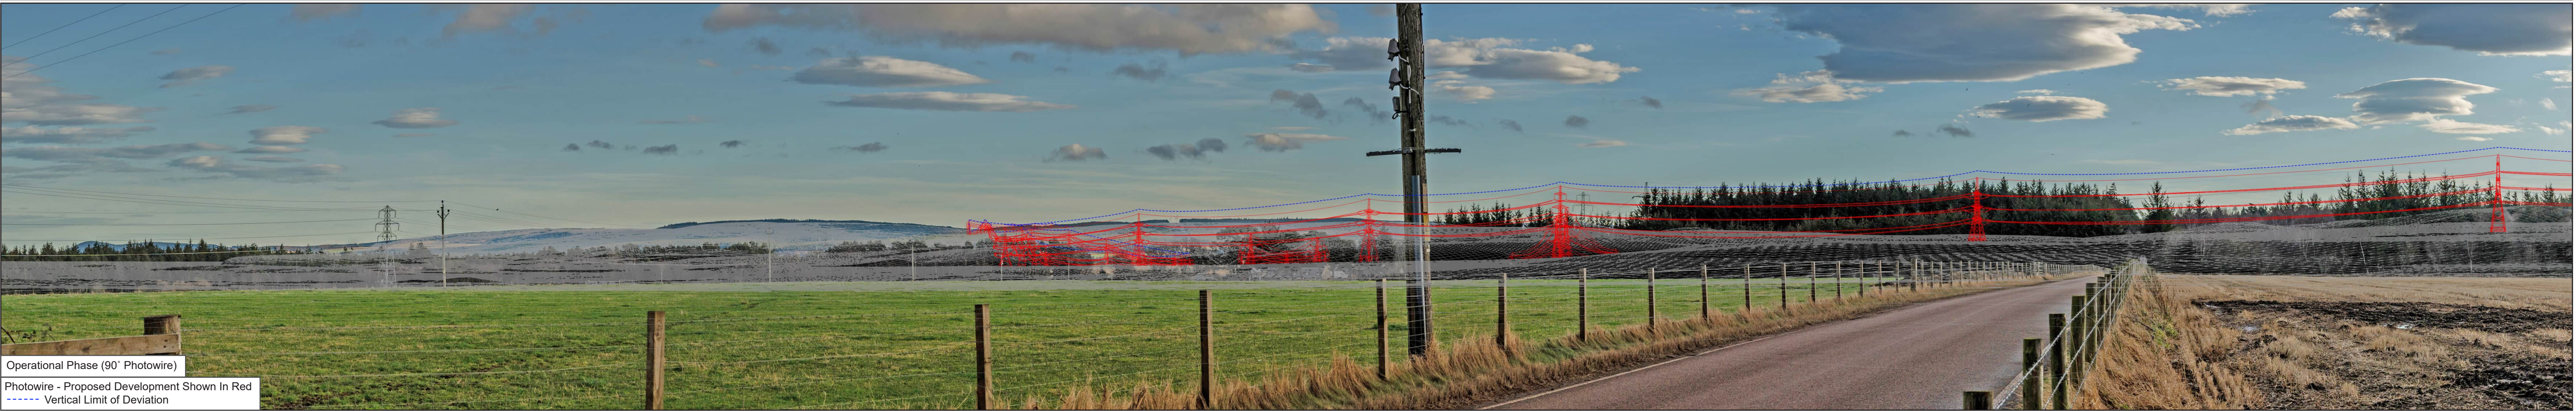

Operational Phase (90° Photowire)

Photowire - Proposed Development Shown In Red
----- Vertical Limit of Deviation

Visualisation 7.61b
Viewpoint 61: B9103, Cranloch
Beauly to Blackhillock to New Deer to Peterhead 400 kV OHL Project

OS reference:	328658 858475	Viewpoint Type:	Representative Viewpoint	Horizontal field of view:	90° (cylindrical projection)	Camera:	Sony ILCE-7M4
Eye Level:	94.97 m AOD	Visualisation Type:	Type 3	Vertical Field of View:	13.5°	Lens:	50 mm Fixed Focal Length
Direction of view:	115°	Enlargement Factor:	96% @ A3 extended	Paper size:	841 x 297 mm	Camera Height:	1.5 m AGL
Distance to Development:	1108 m	Principal distance:	812.5 mm	Correct printed image size:	820 x 130 mm	Date and time:	15/01/2025,12:54



Operational Phase (90° Year of Opening Photomontage)

View flat at a comfortable arm's length




Operational Phase (90° Year 7 Photomontage)

View flat at a comfortable arm's length




Operational Phase (90° Year 15 Photomontage)

View flat at a comfortable arm's length



Location Plan

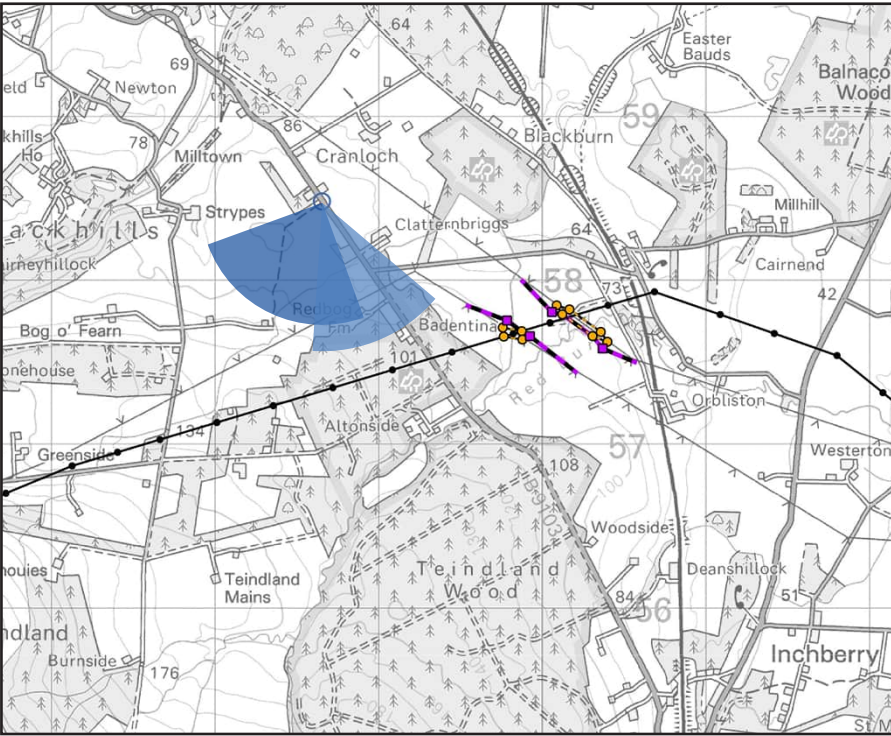

- Key
- Proposed Tower 400 kV
 - Proposed Tower - Existing OHL Works (275 kV)
 - Realignment and Crossing)
 - Proposed Tower - Temporary
 - Proposed OHL Alignment 400 kV
 - Temporary OHL Diversion
 - Proposed Alignment - Existing OHL Works (275 kV Realignment and Crossings)
 - 90° Field of View
 - 53.5° Field of View

Notes:

- The following images provide landscape and visual context only.
- View photomontages flat and at a comfortable arm's length. If viewing these images on a wall or board at an exhibition, you should stand at arm's length from the image presented.
- A visualisation can never show exactly what the Proposed Development will look like in reality due to factors such as: different lighting, weather and seasonal conditions which vary through time and the resolution of the image.
- The images provided give a reasonable impression of the scale of the towers and the distance to the towers, but can never be 100% accurate.
- To form the best impression of the impacts of the proposal these images are best viewed at the viewpoint location shown.
- The viewpoints illustrated are representative of views in the area, but cannot represent visibility at all locations.
- The images must be printed at the right size to be viewed properly (260mm by 820mm).
- If viewing photomontages on screen enlarge to full screen to gain an overview, enlarge to 100% to have a reasonable impression of the size of the development in the view.
- Vertical Limit of Deviation: the maximum height of a tower above ground level.
- The following images are type 3 visualisations and have been produced in accordance with Landscape Institute Technical Guidance Note 06/19 and NatureScot - Visual Representation of Wind Farms Guidance Version 2.2 - February 2017.

Representative of:

Residential receptors: residents in Cranloch (MOR-R-28, MOR-R-29, MOR-R-30, MOR-R-31).

Transport receptor: users of the B9103 (MOR-T-5).

This visualisation has been identified and created for use with the visual impact assessment, but can also be used to inform landscape impacts on LCT290 Upland Moorland and Forestry.

For visual receptor and viewpoint locations refer to **Volume 3: Figure 7.6 Visual Amenity Receptors and Viewpoint Locations** and **Figure 7.7 Visual Context**.

Visualisation 7.61f

Viewpoint 61: B9103, Cranloch

View southwest from the B9103 in Cranloch.

Beauly to Blackhillock to New Deer to Peterhead 400 kV OHL Project

OS reference: 328658 858475

Eye Level: 94.97 m AOD

Direction of view: 205°

Distance to Development: 1108 m

Viewpoint Type: Representative Viewpoint

Visualisation Type: Type 3

Enlargement Factor: 96% @ A3 extended

Principal distance: 812.5 mm

Horizontal field of view: 90° (cylindrical projection)

Vertical Field of View: 13.5°

Paper size: 841 x 297 mm

Correct printed image size: 820 x 130 mm

Camera: Sony ILCE-7M4

Lens: 50 mm Fixed Focal Length

Camera Height: 1.5 m AGL

Date and time: 15/01/2025,12:54



Existing View - Baseline

This image provides landscape and visual context only



Operational Phase (90° Photowire)

Photowire - Proposed Development Shown In Red
----- Vertical Limit of Deviation

Visualisation 7.61g
Viewpoint 61: B9103, Cranloch
Beauly to Blackhillock to New Deer to Peterhead 400 kV OHL Project

OS reference:	328658 858475	Viewpoint Type:	Representative Viewpoint	Horizontal field of view:	90° (cylindrical projection)	Camera:	Sony ILCE-7M4
Eye Level:	94.97 m AOD	Visualisation Type:	Type 3	Vertical Field of View:	13.5°	Lens:	50 mm Fixed Focal Length
Direction of view:	205°	Enlargement Factor:	96% @ A3 extended	Paper size:	841 x 297 mm	Camera Height:	1.5 m AGL
Distance to Development:	1108 m	Principal distance:	812.5 mm	Correct printed image size:	820 x 130 mm	Date and time:	15/01/2025,12:54