
VP23 Cairnton Stone Circle (SM11; S43), recumbent stone in foreground

Views to the southwest with the stone circle in the foreground.



Existing View

Location Plan

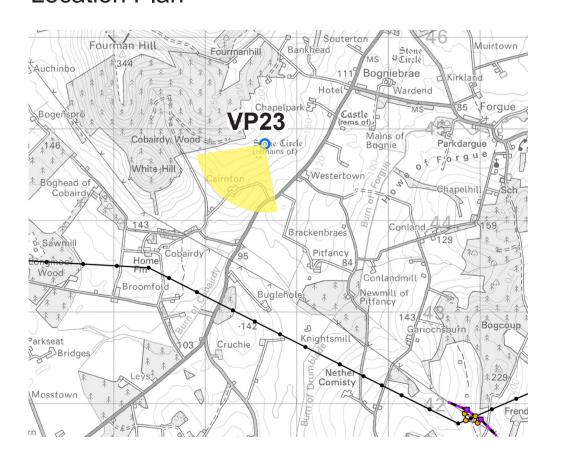

Key Proposed Tower - 400 kV

Proposed Tower - Existing OHL Works (275 kV Realignment and Crossing

Proposed Tower - Temporary

Proposed OHL Alignment - 400 kV

Temporary OHL Diversion

Proposed Alignment - Existing OHL Works (275 kV Realignment and Crossings)

90° Field of View

Height of camera above ground: 1.5 m

Visualisation Type: Type 3 **Projection:** Cylindrical Enlargement Factor: 100% @ A3 Date and time of photography: 16/01/2025,11:10 Camera & lens: Sony ILCE-7M4, 50 mm

Vertical Field of View: 18.6° **Horizontal Field of View:** 90° Viewpoint location: X 358641, Y 844844, **AOD** 185.59 m Distance to the nearest tower: 13239 m Direction of view: 215°

This image provides landscape and visual context only View flat at a comfortable arm's length. If viewing on screen enlarge to full screen to gain an overview, enlarge to 100% to have a reasonable impression of the size of the development in the view.

This image is an existing view to support a Type 3 photomontage and has been produced in accordance with Landscape Institute Technical Guidance Note 06/19.

For viewpoint locations refer to Volume 3: Figure 11.4 Cultural Heritage Viewpoint Locations.



Beauly to Blackhillock to New Deer to Peterhead 400 kV OHL Project Visualisation 11.23a VP23 Cairnton Stone Circle (SM11; S43), recumbent stone in foreground Existing View

VP23 Cairnton Stone Circle (SM11; S43), recumbent stone in foreground

Views to the southwest with the stone circle in the foreground.




Operational Phase (90° Photowire)

----- Vertical Limit of Deviation

For viewpoint locations refer to Volume 3: Figure 11.4 Cultural Heritage Viewpoint Locations.

Location Plan

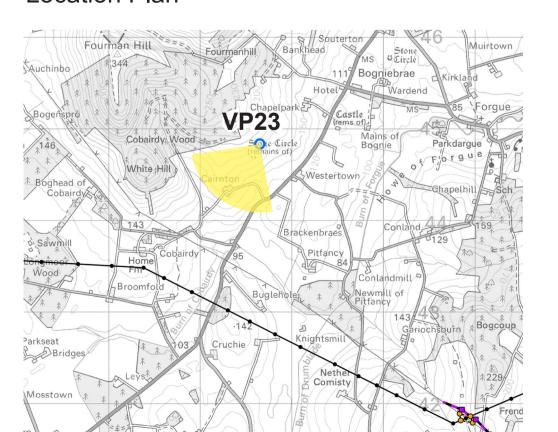

Vertical Field of View: 27.3° Horizontal Field of View: 90° Viewpoint location: X 358641, Y 844844, **AOD** 185.59 m Distance to the nearest tower: 13239 m Direction of view: 215°

Height of camera above ground: 1.5 m

Proposed Tower - 400 kV

Key

- Proposed Tower Existing OHL Works (275 kV Realignment and Crossing
- Proposed Tower Temporary
- Proposed OHL Alignment 400 kV Temporary OHL Diversion
- Proposed Alignment Existing OHL Works (275 kV Realignment and Crossings)
- 90° Field of View

This image provides landscape and visual context only View flat at a comfortable arm's length. If viewing on screen enlarge to full screen to gain an overview, enlarge to 100% to have a reasonable impression of the size of the development in the view.

This image is an existing view to support a Type 3 photomontage and has been produced in accordance with Landscape Institute Technical Guidance Note 06/19.

Beauly to Blackhillock to New Deer to Peterhead 400 kV OHL Project Visualisation 11.23b VP23 Cairnton Stone Circle (SM11; S43), recumbent stone in foreground Operational Phase (90° Photowire)



Visualisation Type: Type 3 **Projection:** Cylindrical Enlargement Factor: 100% @ A3

Date and time of photography: 16/01/2025,11:10 Camera & lens: Sony ILCE-7M4, 50 mm


VP23 Cairnton Stone Circle (SM11; S43), recumbent stone in foreground

Views to the southwest with the stone circle in the foreground.



Operational Phase (90° Year of Opening Photomontage)

Location Plan

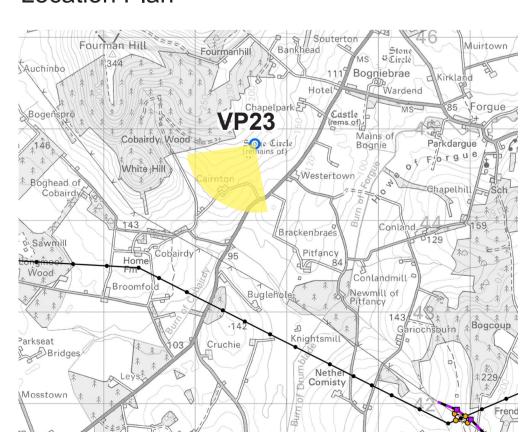

Proposed Tower - 400 kV
 Proposed Tower - Existing OHL Works (275 kV Realignment and Crossing
 Proposed Tower - Temporary
 Proposed OHL Alignment - 400 kV

Temporary OHL Diversion

Proposed Alignment - Existing OHL Works (275 kV Realignment and Crossings)

90° Field of View

Visualisation Type: Type 3
Projection: Cylindrical
Enlargement Factor: 100% @ A3
Date and time of photography: 16/01/2025,11:10
Camera & lens: Sony ILCE-7M4, 50 mm

Vertical Field of View: 27.3° Horizontal Field of View: 90° Viewpoint location: X 358641, Y 844844, AOD 185.59 m Distance to the nearest tower: 13239 m Direction of view: 215° Height of camera above ground: 1.5 m

NOTES:

This image provides landscape and visual context only View flat at a comfortable arm's length. If viewing on screen enlarge to full screen to gain an overview, enlarge to 100% to have a reasonable impression of the size of the development in the view.

This image is an existing view to support a Type 3 photomontage and has been produced in accordance with Landscape Institute Technical Guidance Note 06/19.

For viewpoint locations refer to Volume 3: Figure 11.4 Cultural Heritage Viewpoint Locations.

